


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: John B. David, Deputy Surveyor, under Contract No.131, dated June 8, 1869.

Record States: Set stone 16x10x6 for corner to sections 1,2,11 & 12.

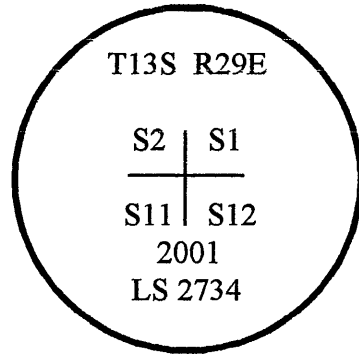

Description of corner evidence found:

Found a stone 18x10x6, 6 inches in the ground, marked with 5 grooves on the south face, no other visable marks.

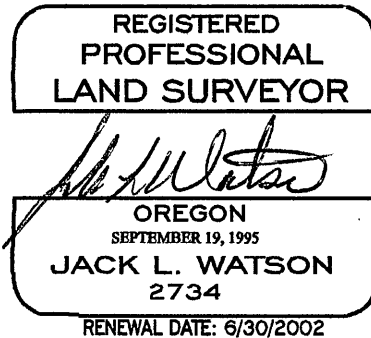

See Record Map of Survey No. 1607

Description of monument and accessories set at corner location:

I accept the original marked corner stone. I replaced the original stone with a 2½"x30" aluminum pipe with attached 3" aluminum cap, 16 inches in the ground, surrounded by a mound of stone. I buried the original corner stone north and alongside the pipe. The cap is stamped as shown in the diagram.

From which I scribe new bearing trees:

- A 8" Juniper bears N86°E, 29.1 feet, marked T13SR29ES1BT.
- A 7" Juniper bears S15°E, 27.2 feet, marked T13SR29ES12BT.
- A 5" Juniper bears S20°W, 32.0 feet, marked XBT.
- A 8" Juniper bears N29°W, 18.6 feet, marked T13SR29ES2BT.

I used a magnetic compass, with 18° east variation, to center of BT's and steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's.

Date: June 25, 2001

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 6 day of Aug., 2001.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)