


CORNER RESTORATION

CORNER: NW COR SEC. 24, TWP. 13 S., RANGE 29 E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

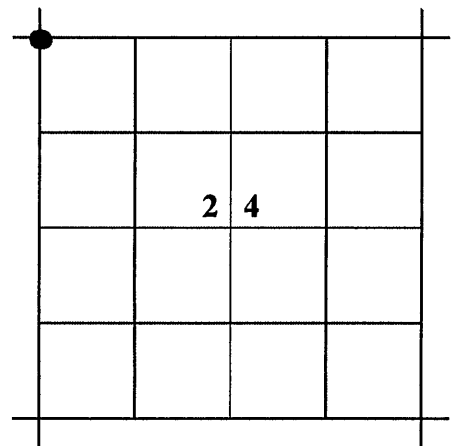

ORIGINAL DESCRIPTION: Set Stone 18x9x8 for Corner to Sec.s 13, 14, 23 & 24

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
D.E. Mooney
M.C. Springer

RECEIVED AND
FILED

NOV. 28, 2001
OFFICE OF COUNTY SURVEYOR
Robert D. Bagett

ATTEST: *Michael C. Springer*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Renewal Date 12/31/01

November 15, 2001

EVIDENCE FOUND: The corner of sections 13, 14, 23 and 24 is determined at the corner of barbed wire fences which extend east, south and west. Remains of an old down fence run north. This point is accepted as the best available evidence of the position of the original corner.

See Record Map of Survey No. 1616


DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 30" in the ground, with attached Bagett-Griffith and Blackman brass cap marked as shown.

From which I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N89°40'E, 25.0 ft., with attached alum. cap marked BGB SURVEY MARKER RP 1 2001. In east-west fence line
A 5/8"x30" iron pin, bears S04°22'E, 25.0 ft., with attached alum. cap marked BGB SURVEY MARKER RP 2 2001. In north-south fence line
A 5/8"x30" iron pin, bears S89°40'W, 25.0 ft., with attached alum. cap marked BGB SURVEY MARKER RP 3 2001. In east-west fence line
A 5/8"x30" iron pin, bears N04°22'W, 25.0 ft., with attached alum. cap marked BGB SURVEY MARKER RP 4 2001

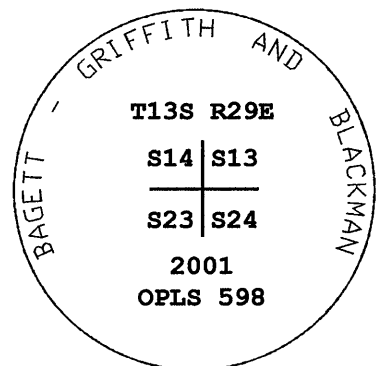

Raised a mound of stone 2 ft. base to top of cap. Used Leica SR530 RTK GPS receivers to measure reference points.