



**CERTIFIED RECORD OF LAND CORNER MONUMENTATION
C1/4 SECTION 2, T13S, R30E, W.M.**

History of original corner establishment:
NONE

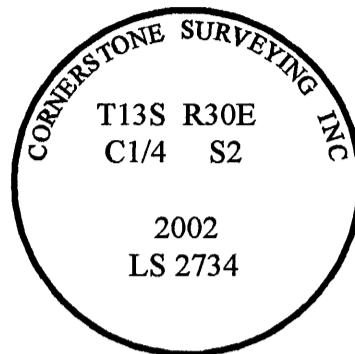

Description of corner evidence found:
NONE

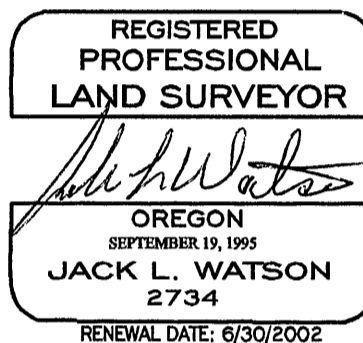

See Record Map of Survey No. 1626

Description of monument and accessories set at corner location:
At the corner position determined by survey I set a 5/8" x 30" iron pin with attached 2" aluminum cap. The cap is stamped as shown in the diagram.

- From which:
- A 13" Juniper bears N65°E, 37.0 feet, marked C1/4S2BT.
 - A 26" Juniper bears S24°E, 30.0 feet, marked C1/4S2BT.
 - A 5/8"x30" iron pin bears S46°W, 17.60 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.
 - A 5/8"x30" iron pin bears S46°W, 27.60 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination.

Date: February 14, 2002

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 4 day of MARCH, 2002.
Robert D. Bayett by _____
(COUNTY OFFICIAL) (DEPUTY)