


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: John B. David , Deputy Surveyor, under Contract No. 331, approved November 16, 1869.

Surveyor General Record States: Set stone 15x10x6 for 1/4 section corner.

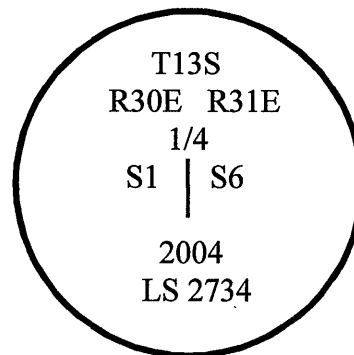

Description of corner evidence found:

No evidence of the original corner was found.

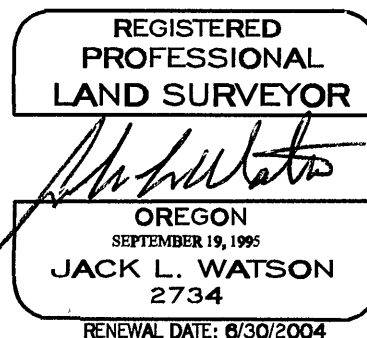

See Record Map of Survey No. 1700

Description of monument and accessories set at corner location:

At the point determined by proportion, I set a 2½"x30" aluminum pipe with attached 3½" aluminum cap, 26 inches in the ground. The cap is stamped as shown in the diagram.

From which:

- A 20" juniper bears S59°E, 31.7 ft. marked 1/4S6BT
- A 10" juniper bears S27°W, 86.3 ft. marked 1/4S1BT
- A 9" juniper bears S60°W, 109.7 ft. marked 1/4S1BT
- A 14" juniper bears N56°W, 100.2 ft. marked 1/4S1BT

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT and magnetic compass, with 18° E. declination.

Date: December 23, 2003

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 3 day of May, 2004.
Kathy O. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)