


CERTIFIED RECORD OF LAND CORNER MONUMENTATION
C1/4 Section 6, T13S, R31E, W.M.

History of original corner establishment:
NONE



Description of corner evidence found:
NONE

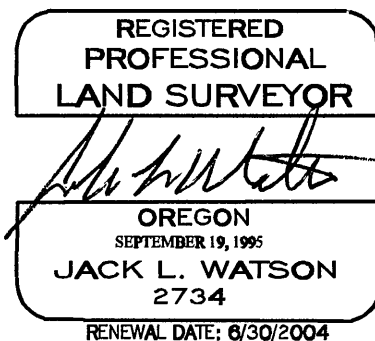

See Record Map of Survey No. 1700

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x30" iron pin with attached 2" aluminum cap. The cap is stamped as shown in the diagram.

From which:

- A 11" Juniper bears N24°E, 19.5 feet, marked C1/4S6BT.
- A 15" Juniper bears S12°E, 15.0 feet, marked C1/4S6BT.
- A 9" Juniper bears S83°W, 11.0 feet, marked C1/4S6BT.
- A 11" Juniper bears N33°W, 25.1 feet, marked C1/4S6BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination.

Date: April 22, 2004

Office of Surveyor County of Grant
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 3 day of MAY, 2004.
Edmund D. Beyer by _____
(COUNTY OFFICIAL) (DEPUTY)