


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: John B. David , Deputy Surveyor, under Contract No. 331, approved November 16, 1869.

Surveyor General Record States: Set stone 16x10x6 for corner to sections 6, 7, 1 & 12.

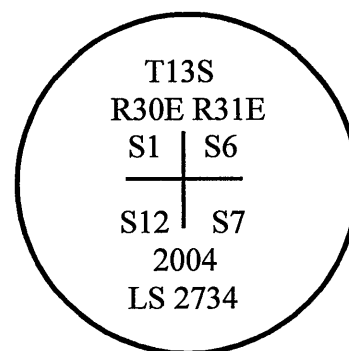

Description of corner evidence found:

No evidence of the original corner was found.

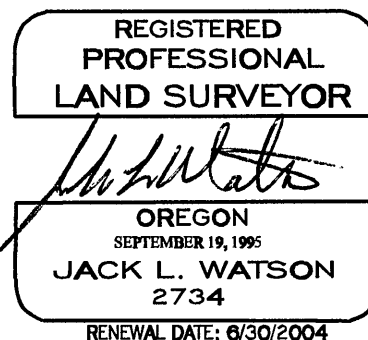

See Map of Survey No. 1700

Description of monument and accessories set at corner location:

At the point determined by proportion, I set a 2½"x30" aluminum pipe with attached 3½" aluminum cap, 28 inches in the ground. The cap is stamped as shown in the diagram.

From which:

A 19" juniper bears S61°E, 33.9 ft. marked T13SR31ES7BT.

A 5/8"x30" iron pin bears N61°W, 8.17 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S27°W, 10.45 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears N27°E, 8.83 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT and magnetic compass, with 18° E. declination.

Date: December 23, 2003

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 3 day of MAY, 2004.
Robert D. Bryant by _____
(COUNTY OFFICIAL) (DEPUTY)