


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by: John B. David , Deputy Surveyor,
under Contract No. 131, dated June 8, 1869.

Surveyor General Record States: Set stone 18x12x10 inches, for corner
to Sections 8,9,16 & 17.

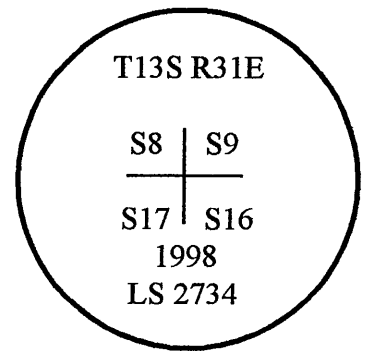

Description of corner evidence found:

Found a basalt stone, 18x12x7 inches, marked with 4 notches on the
south edge and 4 notches on the east edge, in a mound of stone.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jack L. Watson

OREGON
SEPTEMBER 19, 1995
JACK L. WATSON
2734
RENEWAL DATE: 6/30/2000

Description of monument and accessories set at corner location:

I accept the position of the original marked corner stone. At the corner position I set a 2½"x30"
aluminum pipe with attached 3" aluminum cap, 24 inches in the ground, surrounded by a mound
of stone. I buried the original corner stone south and alongside the pipe. The cap is stamped as
shown in the diagram.

From which I scribe new bearing trees:

A 18" Juniper bears S63°E, 134.95 feet, marked T13SR31ES16BT.

A 12" Juniper bears S55°W, 51.89 feet, marked T13SR31ES17BT.

From which I set new reference monuments:

A 5/8"x15" iron pin bears N55°E, 18.62 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC.

A 5/8"x15" iron pin bears N42°W, 17.86 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's
and magnetic compass, with 20° E. declination. I used a magnetic compass, with 20° east
variation and steel tape to tie references.

Date: September 2, 1998

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 4TH day of SEPT., 1998.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)