

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: John B. David, Deputy Surveyor,
under Contract No. 131, dated June 8, 1869.

Surveyor General Record States: Set stone 17x10x6 inches,
for corner to Sections 11,12,13 and 14.



Description of corner evidence found:

No evidence of the original corner stone monument was found.
The corner position is not lost. I found a fence running north-south
and the remains of fences running east and west, evidenced by old
rock jack mounds. I accept the fence corner as the
best available evidence of the corner position.

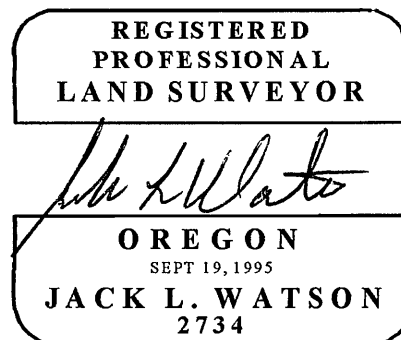

Renewal Date 6/30/2008

Description of monument and accessories set at corner location:

I accept the fence corner position for this corner position. I set a 2½"x30" aluminum pipe with
attached ¾" aluminum cap, 20 inches in the ground, surrounded by a mound of stone. The cap is
stamped as shown in the diagram.

From which:

A 5/8"x30" iron pin bears N2°E, 13.20 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears N84°E, 3.40 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S2°W, 9.00 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears N80°W, 17.48 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC.

I used a steel tape and magnetic compass, with 18° E. declination to tie references. See Grant
County Survey No. 1811

Date: June 12, 2007

Office of County of
State of , I hereby certify that the within instrument was filed in this office
for record on the day of , 2007.
..... by
(COUNTY OFFICIAL) (DEPUTY)

J-21

**RECEIVED AND
FILED**

JUNE 22, 2007
OFFICE OF COUNTY SURVEYOR
Attest: