


CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original corner established by: John B. David, Deputy Surveyor, under Contract No.131, dated June 8, 1869.
Record States: South 80.00 chs, Set stone 16x8x6 for corner to sections 12,13,7 & 18.

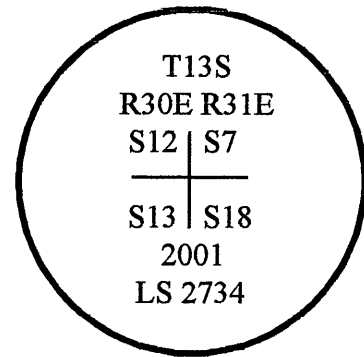

Description of corner evidence found:

Found stone 15x9x7 marked with 2 notches on the north edge, the stone is broken off were the other marks should be. Stone was lying on its' side, sunken 4" in ground with 3 other stones around it.

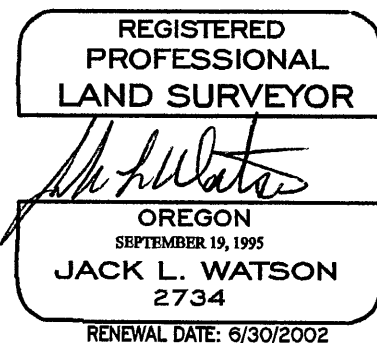

See Record Map of Survey No. 1601

Description of monument and accessories set at corner location:

I accept the original marked corner stone. I replaced the original stone with a 2½"x30" aluminum pipe with attached 3" aluminum cap, set 20 inches in the ground, surrounded by a mound of stone. I buried the original corner stone east and alongside the pipe. The cap is stamped as shown in the diagram.

From which I scribe a new bearing trees:

- A 7" Juniper bears N12°E, 21.5 feet, marked T13SR31ES7BT.
- A 15" Juniper bears S34°E, 27.9 feet, marked T13SR31ES18BT.
- A 8" Juniper bears S16°W, 43.2 feet, marked T13SR30ES13BT.
- A 11" Juniper bears N31°W, 43.8 feet, marked T13SR30ES12BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination.

Date: June 4, 2001

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 18th day of JULY, 2001.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)