

CORNER


RESTORATION

CORNER: E1/4 Sec 13 TWP. 13S. RANGE 31E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

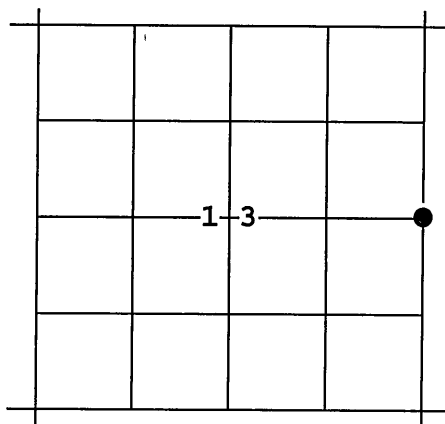

ORIGINAL DESCRIPTION: Set stone 18x10x8 for 1/4 Sec. corner.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney

RECEIVED AND
FILED

Aug. 21, 1996
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: *Steven D. Follweiler*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598
RENEWAL DATE 12/31/97

July 25, 1996

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 24x12x9 marked 1/4 on one face, tipped over to the East. I accept the position of this stone for the 1/4 corner. This position is harmoniously related to other known corners on the range line.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 30" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which: I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N45°E, 50.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1996 OPLS 598.

A 5/8"x30" iron pin, bears S45°E, 50.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1996 OPLS 598.

A 5/8"x30" iron pin, bears S45°W, 50.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1996 OPLS 598.

A 5/8"x30" iron pin, bears N45°W, 50.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1996 OPLS 598.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR
T13S
¼
R31E | R32E
S13 | S18
1996
OPLS 598

Buried marked stone North and alongside iron pipe, raised a mound of stone 4 ft. base surrounding iron pipe. Used true bearings, (solar observation), and electronic distance measuring device.