


CORNER RESTORATION

NW corner
CORNER Sec. 22 TWP 13 S., RANGE 31 E., W.M.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

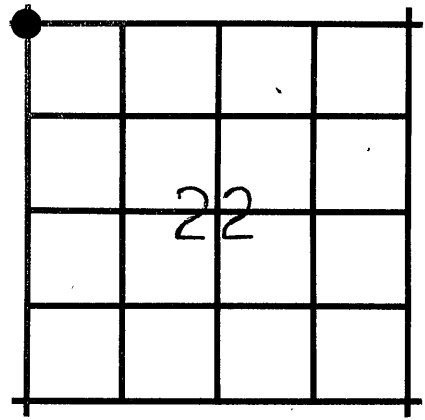

ORIGINAL DESCRIPTION:

Set stone 16x10x8 for corner to Secs. 15, 16, 21 and 22.

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
G. T. Blackman
J. Meyerholz

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

May 21, 1981

Grant County Surveyor

EVIDENCE FOUND:

Found basalt stone 16x10x8 inches marked with 3 notches on one edge and 1 notch on other edge (the upper 4 inches of the stone had broken off on this edge which is where the other 2 notches would have been). Corner stone was with remains of a slightly scattered mound of stone.

RECEIVED AND
FILED

JUL 1 1981

OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
Attest: *Sammie Lawrence*

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point:

I set a 1½"x30" iron pipe 28 inches in the ground with brass cap marked as shown.

from which I scribe NEW BEARING TREES:


A Juniper 7 inches in diam. bears N. 35° E., 80.5 ft. mkd.
T13SR31ES15 CSBT.

A Juniper 10 inches in diam. bears S. 40° E., 68.5 ft. mkd.
T13SR31ES22 CSBT.

A Juniper 8 inches in diam. bears S. 26° W., 64.0 ft. mkd.
T13SR31ES21 CSBT.

A Juniper 10 inches in diam. bears N. 34° W., 63.6 ft. mkd.
T13SR31ES16 CSBT.

MONUMENT MARKED

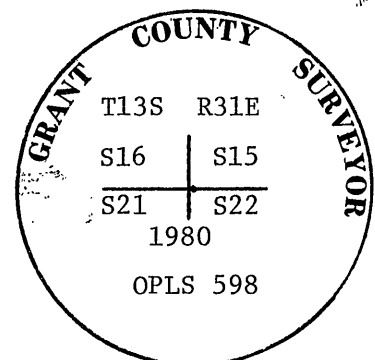

I buried the original corner stone North and alongside the iron pipe and surrounded pipe with a mound of stone to top of cap.

Used magnetic compass with 20° East variation and steel tape, measuring to face to BT blaze.

This corner is 30 feet West of a dry wash and 43 feet West of a North-South fenceline.