

CORNER RESTORATION


CORNER: NE Sec 22 TWP 13S. RANGE 31E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently remonumented by Robert D. Bagett, County Surveyor, Sept. 15, 1975
See Corner restoration records.

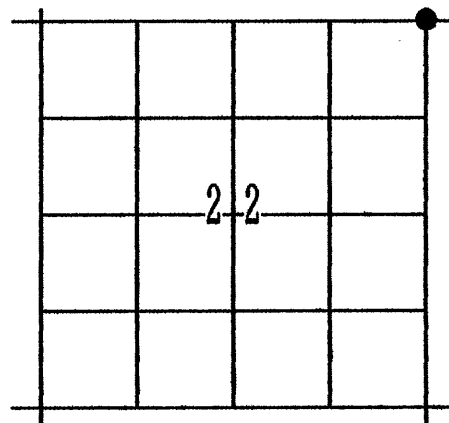

ORIGINAL DESCRIPTION: Set stone 19x12x8 for cor to secs. 14, 15, 22, & 23.

I found the original stone in 1975. My record states:

Set a 1½"x30" iron pipe 24" in the ground with brass cap marked as shown.
(marks shown below)

RESTORATION BY, STAMP AND DATE:


R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED


Feb 17, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *Jeremy Russell*



Robert D. Bagett



Renewal Date 12/31/95

December 29, 1994

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with 2½" brass cap marked as shown below, surrounded by a mound of stone, 4ft. base to top of cap.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var..
The monument set in 1975 is in good condition.

From Which:

I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 1
1994 OPLS 598.

A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 2
1994 OPLS 598.

A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 3
1994 OPLS 598.

A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 4
1994 OPLS 598.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T13S R31E
S15 | S14

S22 | S23

1975
OPLS 598

Used mag. compass with 20°E var. and a steel tape.