

CORNER RESTORATION

CORNER: W1/4 SEC. 22 TWP. 13 S. RANGE 31 E., W.M.


ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

SUBSEQUENT SURVEYS:

- Remonumented by Duane Griffith, PLS as shown on Record Map of Survey No. 160, recorded November 24, 1969 in the office of the Grant County Surveyor.

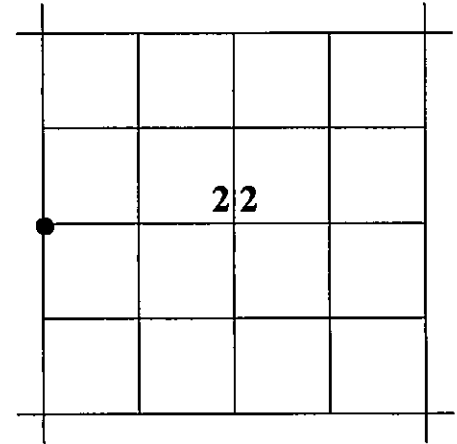

ORIGINAL DESCRIPTION: Set Stone 15X10X7 for 1/4 Sec. corner at base of hill.

- Map of Survey No. 160 indicates a 5/8"x30" iron pin was set. There is also a note on the map that states: "1/4 corner set on basis of information on Oregon State Highway map no. 5B-22-21 and Hall Acres Subdivision plat"

RESTORATION BY, STAMP AND DATE:

Michael C. Springer, PLS
Jason L. Hatfield, PLS


RECEIVED AND
FILED

MARCH 1, 2010

OFFICE OF COUNTY SURVEYOR

ATTEST:

Jason L. Hatfield

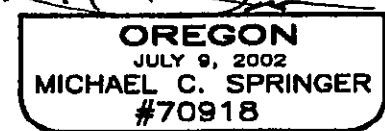

EXPIRES: 6/30/2010

February 10, 2010

Grant County Surveyor

EVIDENCE FOUND: This corner falls near the northerly edge of a log yard. There has been a significant amount of mill debris piled on top of this corner since it was remonumented in 1969. We enlisted the help of a mill employee who used a front-end loader to excavate the pile. After removing approximately 7 feet of material, we found a 5/8" iron pin with no cap set firmly in the ground. We also found a 5/8" iron pin from Record Survey No.160, which was N00°05'55"W, 10.04 feet from the 1/4 corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:


At the corner point: we set a 1½"x30" galv. iron pipe, 30" in the ground, with attached Grant County Surveyor brass cap over the top of the 5/8" iron pin, and built a 2 foot mound of stone. Cap is marked as shown below.

From which, we SET NEW REFERENCE P OINTS:

- A 5/8" iron pin bears N79°02'03"E, 59.30 ft., with attached 1½" aluminum cap marked Grant County Surveyor RP1 2010.
- A 5/8" iron pin bears N55°38'09"E, 23.30 ft., with attached 1½" aluminum cap marked Grant County Surveyor RP2 2010.
- A 5/8" iron pin bears N55°53'59"W, 27.06 ft., with attached 1½" aluminum cap marked Grant County Surveyor RP3 2010.
- A 5/8" iron pin bears N70°23'20"W, 47.17 ft., with attached 1½" aluminum cap marked Grant County Surveyor RP4 2010.

All four RP's were set in an east-west running barbed wire fence.

Placed a fiberglass post north and alongside the brass cap. Bearings are based on geodetic North from a GPS observation taken at the corner.

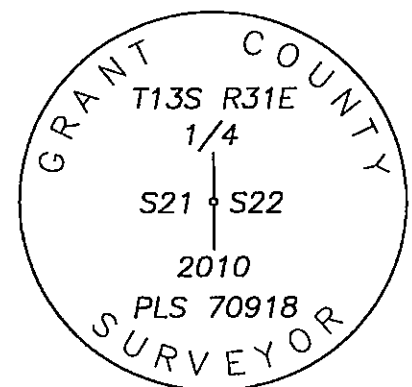

STATE PLANE COORDINATES (3601 OR N) Reference Datum: NAD83

Northing: 280,169.00 ft.

Easting: 8,598,871.17 ft.

Ellip. Ht: 3,025.6 ft.