

CORNER RESTORATION


CORNER: E1/4 Sec 23 TWP 13S. RANGE 31E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently remonumented by Robert D. Bagett, County Surveyor, Jan. 27 1970, See corner restoration records.

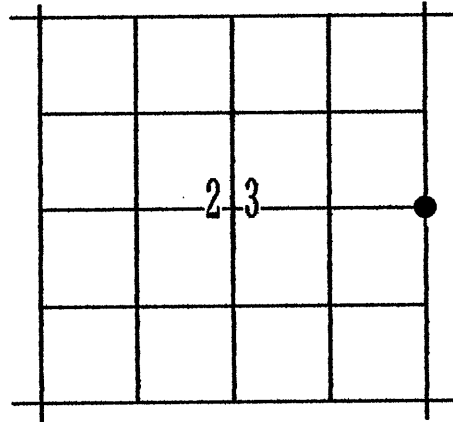

ORIGINAL DESCRIPTION: Set stone 17x8x5 for 1/4 sec. cor.

I found the original stone in 1970, my record states:

I set a 2"x30" iron pipe 24" in the ground, and surrounded same with mound of stone.

I take one new bearing tree.

From the 1/4 cor.

A 12 inch juniper bears S.47°W., 53.5 feet dist., scribed 1/4 S23 BT.



RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

Feb. 17, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: *Jeremy Russell*

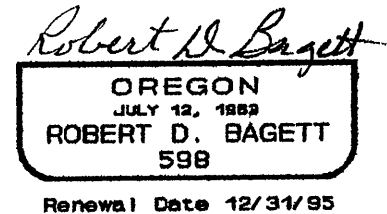

December 29, 1994

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with a 2½" Grant County Surveyor brass cap marked as shown below, surrounded by a mound of stone, 2 ft. base to top of cap.

From which:

A multi-trunk Juniper, the northeast trunk being 16"diam., bears S47°W, 53.5 ft. with partially healed over blaze, scibing visible.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var..

The monument set in 1970 is in good condition.

From Which:

I SCRIBE NEW BEARING TREES:

A Juniper 6"diam., bears S66°E, 49.2 ft. marked X CSBT.

A Juniper 8"diam., bears N50°W, 84.1 ft. marked 1/4 S23 CSBT.

Also: I SET A NEW REFERENCE POINT:

A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1994 OPLS 598.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

1/4
S23 | S24
LS 598
1970

Used true bearings, (solar observation), and electronic distance measuring device, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.