


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
NONE

T. 135., R. 31. E.



Description of corner evidence found:
NONE

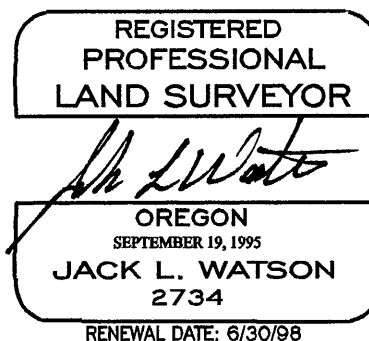

See Land Partition Plat No.97-29

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x 30" iron pin with attached 2" aluminum cap, driven 30 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I scribe new bearing trees:

A 4" Juniper bears S30°W, 19.60 feet, marked XBT.

A 9" Juniper bears N84°W, 15.83 feet, marked CN1/16S25 BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 20° E. declination.

Date: September 25, 1997

Office of SURVEYOR County of GRANT
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 3rd day of NOV, 1997.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)