

RECEIVED AND
FILED

JUN 14 1973

JOHN LIVEIRA, County Clerk

CORNER RESTORATION


By Betty Lowmyer Deputy

East $\frac{1}{4}$
CORNER Sec. 29 TWP 13S RANGE 31E., W.M.

ORIGINAL SURVEY BY: Thompson, Pengra, & David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

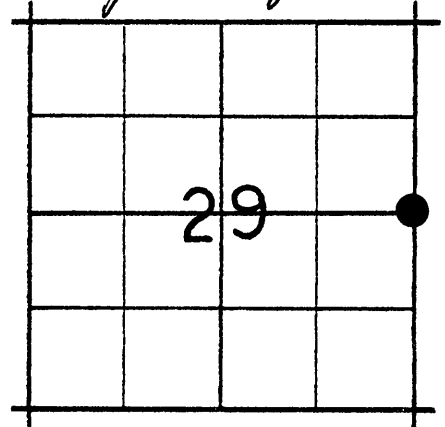

ORIGINAL DESCRIPTION:

North Between Secs. 28 and 29

Var. 21° East

40.00 Set Stone $1\frac{1}{4} \times 8 \times 6$ for $\frac{1}{4}$ sec. cor.

RESTORATION BY, STAMP AND DATE:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

May 17, 1973

EVIDENCE FOUND:

Found serpentine stone $1\frac{1}{4} \times 8 \times 6$ marked $\frac{1}{4}$ and set in a dim mound of stone.

This corner is about 60 feet East of a N-S fenceline and 100 feet south of a E-W fenceline.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

Set a $1\frac{1}{2} \times 30$ " iron pipe, 26" in the ground, with brass cap marked as shown:
from which NEW BEARING TREES:

A 12" juniper bears $S59^{\circ}E, 108.4$ ft., marked $\frac{1}{4}$ S28 CS BT.

A 12" juniper bears $S28^{\circ}W, 206.9$ ft., marked $\frac{1}{4}$ S29 CS BT.

MONUMENT MARKED

Buried the original $\frac{1}{4}$ cor. stone South and alongside the iron pipe and raised a mound of stone to top of pipe.

Used compass with 20° East var. and steel tape.

Measured to the face of the blaze on BTs.

Complete and File with Office of the Grant
County Surveyor, Grant County, Oregon,
Courthouse, Canyon City, Oregon 97820

