

CORNER RESTORATION


CORNER: W1/4 Sec 27 TWP 13S. RANGE 31E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently remonumented by Robert D. Bagett, County Surveyor, June 30, 1973
See Corner restoration records.

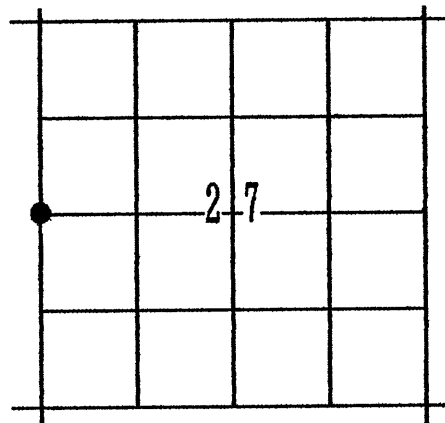

ORIGINAL DESCRIPTION: Set Stone 15x10x8 for 1/4 sec. cor.

I found the original stone in 1973. My record states:
At the corner point: Set 1½"x30" iron pipe 20" in the ground with brass cap marked as shown.

from which
A fence corner post of fences running W-E-S bears S27°E., 44.5 feet. I attached a BT tag to this fence post.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

Feb 17, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: Jeremy Russell

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Renewal Date 12/31/95

January 4, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with attached 2½" brass cap, marked as shown below, set in a mound of stone.

Corner is 1' west of corner of fences running North, East, and West.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1973 is in good condition.
From Which:
I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.
A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598.
A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1995 OPLS 598.
A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1995 OPLS 598.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T13S R31E

¼

S28 | S27

1973

OPLS 598

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.