

CORNER RESTORATION


CORNER: W1/4 Sec 26 TWP 13S. RANGE 31E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently remonumented by the Bureau of Land Management Aug-Sept 1971
See BLM field notes of Record Map of Survey No. 286

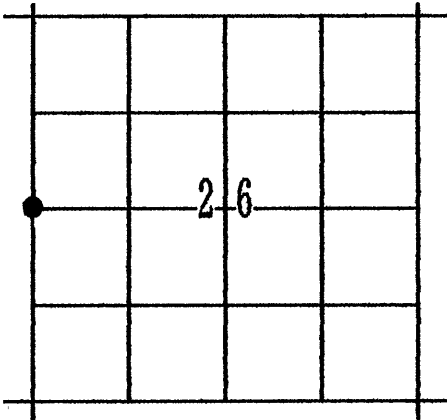

ORIGINAL DESCRIPTION: Set Stone 17x10x8 for 1/4 Sec. Corner.

The BLM found the original stone in 1971. Their record states:

Set an iron post, 28 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 2 ft. base, to top, with brass cap mkd.
(marks shown below)

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

Feb 17, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: Jeremy Russell

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1883
ROBERT D. BAGETT
598
Renewal Date 12/31/95


December 30, 1994

Grant County Surveyor

EVIDENCE FOUND: Found a 2½" galvanized iron pipe with attached 3" brass cap marked as shown below, set in a mound of stone.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var..

The monument set in 1971 is in good condition.
From Which:
I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1994 OPLS 598.
A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1994 OPLS 598.
A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1994 OPLS 598.
A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1994 OPLS 598.



Repaired mound of stone 2 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.