


# CORNER RESTORATION

CORNER: E1/4 SEC. 27 TWP. 13 S. RANGE 31 E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

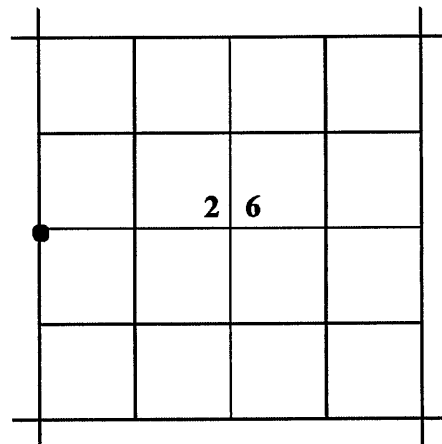

Subsequently remonumented by the Bureau of Land Management August-September 1971  
See BLM field notes of Record Map of Survey No. 286

**ORIGINAL DESCRIPTION:** Set Stone 17x10x8 for 1/4 Sec. Corner.  
The BLM found the original stone in 1971. Their record states: Set an iron post, 28 ins. long, 2½ ins. diam. 18 ins. in the ground, and in a mound of stone, 2 ft. base, to top. with brass cap mkd. (Marks shown below)

**RESTORATION BY, STAMP AND DATE:**

R.D. Bagett  
M.C. Springer

RECEIVED AND  
FILED

MAY 27, 2003  
OFFICE OF COUNTY SURVEYOR  
*Robert D. Bagett*

ATTEST: *Michael C. Springer*

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Robert D. Bagett*  
OREGON  
JULY 12, 1963  
ROBERT D. BAGETT  
598

Renewal Date 12/31/03

April 14, 2003

Grant County Surveyor

**EVIDENCE FOUND:** Found a 2½"x28" galvanized iron pipe with attached 3" brass cap marked as shown below, set in mound of stone. Also found the original marked stone laying south and along side monument in mound of stone. I was contacted by Ross Hodgson, Road Master, he informed me that the proposed Industrial Park Road will soon be constructed and that this monument is in imminent danger and would be destroyed during the road construction. The reference points which I set on Feb. 17, 1995 will also be destroyed due to road construction. I referenced the monument as described below.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**

AT THE CORNER POINT: THE BLM BRASS CAP.

From which I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N.32°28'33"E., 109.35 ft.,  
with attached alum. cap marked GRANT COUNTY SURVEYOR  
RP 1 2003 OPLS 598

A 5/8"x30" iron pin, bears N.86°39'00"E., 129.91 ft.,  
with attached alum. cap marked GRANT COUNTY SURVEYOR  
RP 2 2003 OPLS 598

A 5/8"x30" iron pin, bears S.86°39'00"W., 249.76 ft.,  
with attached alum. cap marked GRANT COUNTY SURVEYOR  
RP 4 2003 OPLS 598

ALSO, FROM WHICH:

GPS Sation "OGILVIE" which is a 3" brass disc., set flush in a concrete block at ground level, bears S.32°28'33"W., 229.38 ft.

MONUMENT MARKED  
BUREAU OF LAND  
MANAGEMENT

T13S R31E  
1/4  
S27 | S26  
1971

Used true bearings (based on Record Map of Survey No. 1659) and EDM distances. After we referenced the monument, I removed the monument and original stone so as to preserve it. I have both the monument and original stone in my possession at 217 N. Canyon Blvd, John Day. The County Road Master, will inform me when the road building activities are complete and at that time I will reset the monument and stone back to their original positions from above references.