


CERTIFIED RECORD OF LAND CORNER MONUMENTATION
C1/4 Section 26, T13S, R31E, W.M.

History of original corner establishment:


Survey No. 286, by BLM cadastral surveyors Harvey Wofford and Lester Fischer, approved August 31, 1972.

Set an iron post, 28" long, 2½" diam., 24" in the ground with brass cap.

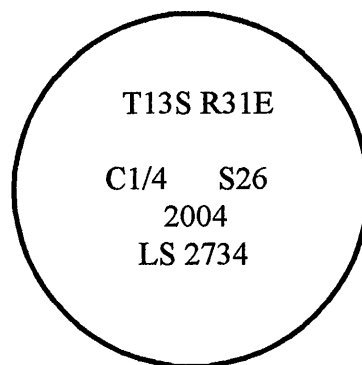

Description of corner evidence found:

Found a 2½ iron pipe with a BLM brass cap which bears N76°18'37"E, 50.32 feet, I do not accept the monument for this corner position.

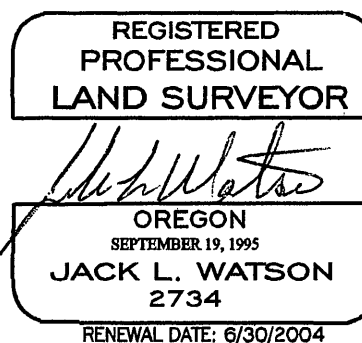

See Record Map of Survey No. 1690

Description of monument and accessories set at corner location:

At the point determined by survey, I set a 2½"x30" aluminum pipe with attached 3" aluminum cap, 24 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which:

A 5/8"x30" iron pin bears N22°E, 12.14 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S17°E, 12.64 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S88°E, 5.63 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears N47°W, 18.77 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape and magnetic compass, with 18° E. declination.

Date: February 20, 2004

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 26 day of FEB, 2004.
Robert L. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)