


CORNER RESTORATION

CORNER: CE1/16 SEC. 26 TWP. 13 S. RANGE 31 E.

ORIGINAL SURVEY BY: Harvey E. Wofford and
Lester E. Fischer, B.L.M.
Cadastral Surveyors

GROUP NUMBER: 741

DATE APPROVED: August 31, 1972

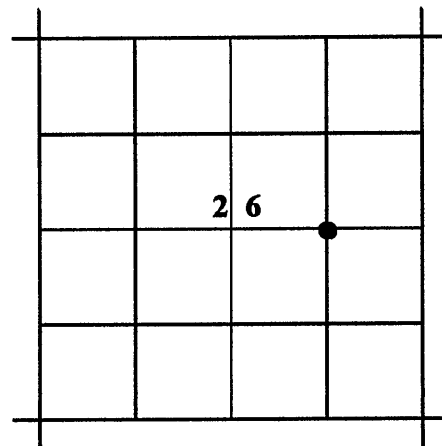

ORIGINAL DESCRIPTION: Set an iron post, 28 ins long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top with brass cap...

RESTORATION BY, STAMP AND DATE:

J.L. Hatfield, PLS
M.C. Springer, PLS

RECEIVED AND
FILED

April 16, 2009

OFFICE OF COUNTY SURVEYOR

M. C. Springer

ATTEST:

Jason L. Hatfield

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jason L. Hatfield
OREGON
NOVEMBER 30, 2007
JASON L. HATFIELD
#69454

EXPIRES: 6/30/2009

April 8, 2009

EVIDENCE FOUND: The BLM brass cap described in the field notes bears N.68°48'04"E., 48.36 feet from the true corner position. I do not accept this BLM monument.

See Record Survey No. 1862

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings including compass var.


At the corner point: I set a 5/8"x30" iron pin, 18" in the ground, alongside a rock outcropping with attached 2" diameter aluminum cap marked as shown.

From which I SCRIBE A NEW BEARING TREE:

A 9" diameter juniper bears S89°E, 44.0 ft.,
marked 1/16 S26 BT.

I also SET A NEW REFERENCE POINT:

A 5/8"x30" iron pin, bears N16°04'48"W, 27.00 ft.,
with attached alum. cap marked BMLS SURVEY MARKER
RP 1 2009.

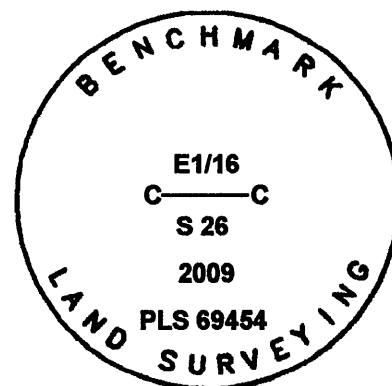

Used RTK GPS to measure the RP. Used a magnetic compass with 17° East variation and a steel tape to measure the BT, measuring to a 50d nail driven in the side-center at the root crown of the tree. Attached a BT tag to the tree.