


CERTIFIED RECORD OF LAND CORNER MONUMENTATION
CS1/16 Section 29, T13S, R31E, W.M.

History of original corner establishment:
NONE



Description of corner evidence found:
NONE

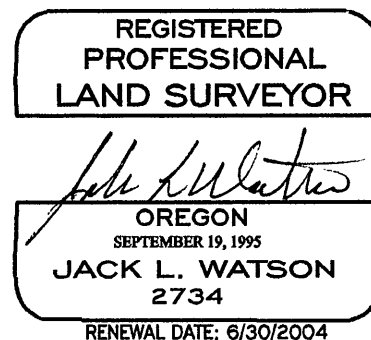

See Record Map of Survey No. 1660.

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x 30" iron pin with attached 2" aluminum cap, driven 30 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I set new reference points:

A 5/8"x30" iron pin bears S23°W, 14.26 feet, with attached red plastic cap marked CORNERSTONE SURVEYING, INC.

A 5/8"x30" iron pin bears N55°W, 16.63 feet, with attached red plastic cap marked CORNERSTONE SURVEYING, INC.

I used a steel tape and magnetic compass, with 20° E. declination, to tie references.

Date: April 15, 2003

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 22 day of April, 2003.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)