

CORNER RESTORATION


CORNER: NW Sec 34 TWP 13S. RANGE 31E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently remonumented by Robert D. Bagett, County Surveyor, Dec. 6, 1973
See Corner restoration records.

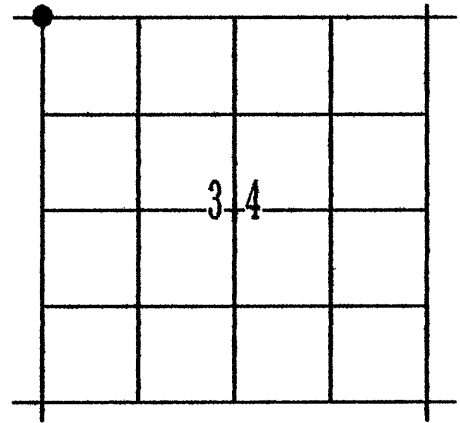

ORIGINAL DESCRIPTION: Set Stone 20x14x6 for corner to secs. 27, 28, 33, and 34.

I found the original mound of stone in 1973. My record states:
Found dim mound of stone at the corner of fences running North and West, found stone 12x6x15 in rock jack, but could find no marks on it. I accept this position as the section corner based on the fence, the mound, and the harmonious relationship to other known corners in the area.

At the corner point: Set a 1½"x30" iron pipe 26" in the ground with brass cap marked as shown.(marks shown below)

RESTORATION BY, STAMP AND DATE:



R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

Feb. 17, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *Jeremy Russell*

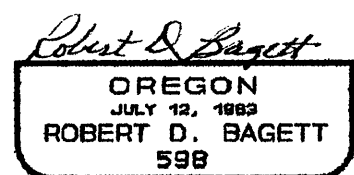

Renewal Date 12/31/95

January 4, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with attached 2½" brass cap, marked as shown below, set in a mound of stone.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var..
The monument set in 1973 is in good condition.

From Which:

I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598.

A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1995 OPLS 598.

A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1995 OPLS 598.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T13S	R31E
S28	S27
S33	S34
1973	
PLS 598	

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.