

CORNER RESTORATION


CORNER: N1/4 Sec 34 TWP 13S. RANGE 31E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently resurveyed & monumented
by Robert D. Bagett, County Surveyor,
Dec. 6, 1973 See Corner restoration records.

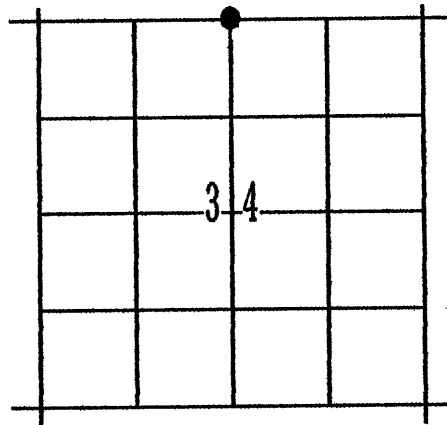

ORIGINAL DESCRIPTION: Set stone 14x12x10 for 1/4 corner.

I did not find the original stone in 1973. My record states:
The position of the 1/4 corner was established by means of single
proportionate measure between the accepted section corners 1/2 mile East
and West.

At point for 1/4 section corner: Set a 1½"x30" iron pipe 24 inches in the
ground, with a brass cap marked as shown: (marks shown below)

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

Feb 17, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: *Jeremy Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598
Renewal Date 12/31/95

January 3, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with attached 2½" brass cap,
marked as shown below, set in a mound of stone.

Corner is 1' north of corner of fences running North, East, and West.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var..

The monument set in 1973 is in good condition.
From Which:
I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 1
1995 OPLS 598.
A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 2
1995 OPLS 598.
A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 3
1995 OPLS 598.
A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 4
1995 OPLS 598.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T13S R31E
S27

1/4
S34
1973
PLS 598

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with
20°E var. and a steel tape.