


CORNER RESTORATION

CORNER: N1/4 SEC. 34 TWP. 13 S. RANGE 31 E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

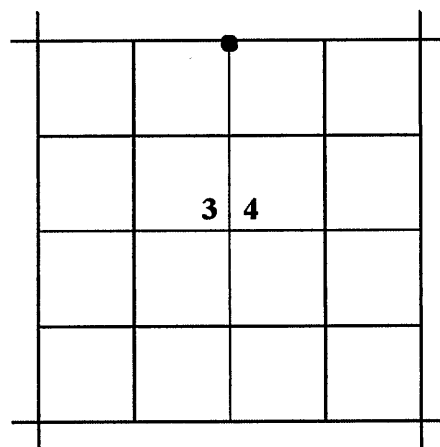

Subsequent surveys:

Dec. 6, 1973, Resurveyed & monumented by Robert D. Bagett, County Surveyor.

Jan. 3, 1995, Set new accessories.

See Corner Restoration records

ORIGINAL DESCRIPTION: Set stone 14x12x10 for 1/4 corner.

I did not find the original stone in 1973. My record states: The position of the 1/4 corner was established by means of single proportionate measure between the accepted section corners 1/2 mile East and West.


At point for 1/4 section corner: Set a 1 1/2"x30" iron pipe 24 inches in the ground, with a brass cap marked as shown: (marks shown below)

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
M.C. Springer
J.L. Hatfield

RECEIVED AND
FILED

JUNE 16, 2003
OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
ATTEST: *Jason D. Hatfield*

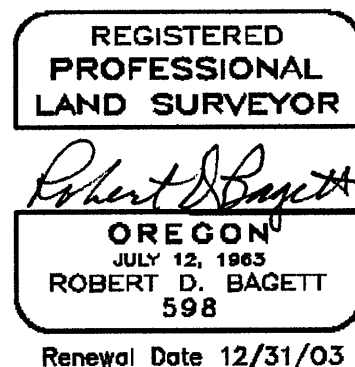

June 16, 2003

Grant County Surveyor

EVIDENCE FOUND: Found a 1 1/2" iron pipe with attached 2 1/2" brass cap, marked as shown below, set in a mound of stone. Due to pending construction of County Road No. 80-A, Industrial Park Road, the existing reference points for this corner are in imminent danger of being destroyed. The new reference points are described below. I also left four the reference points from 1995 in place.

See Record Map of Survey No. 1659

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings including compass var.
The monument set in 1973 is in good condition.


FROM WHICH I USE THE FOLLOWING RIGHT OF WAY PINS OF
COUNTY ROAD NO. 80-A FOR NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N19°21'40"E, 206.39 ft.,
with attached alum. cap marked BGB SURVEY MARKER
60+76.9 40.0 FT

A 5/8"x30" iron pin, bears N01°45'09"W, 222.08 ft.,
with attached alum. cap marked BGB SURVEY MARKER
60+76.9 40.0 FT

A 5/8"x30" iron pin, bears S89°47'19"W, 87.33 ft.,
with attached alum. cap marked BGB SURVEY MARKER
64+13.4 40.0 FT.

A 5/8"x30" iron pin, bears S89°47'19"W, 2.13 ft.,
with attached alum. cap marked BGB SURVEY MARKER
63+84.1 40.0 FT.

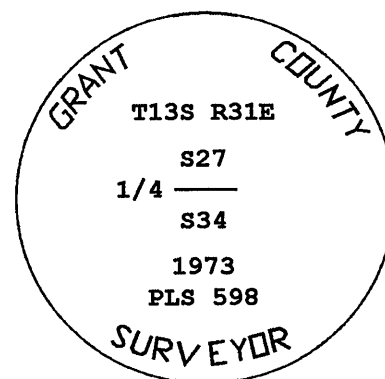

Used true bearings, based on Record Map of Survey No. 1659.