


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**



***History of original corner establishment:***

Not previously established.

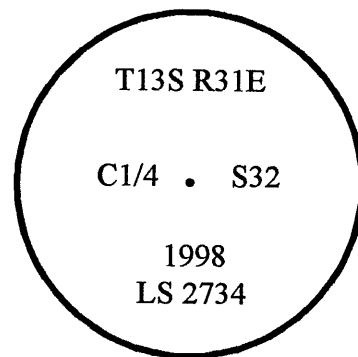

***Description of corner evidence found:***

Not previously established.

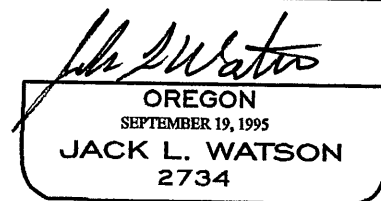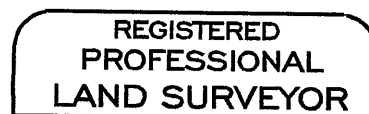

RENEWAL DATE: 6/30/98

See Record Map of Survey No. 1482.

***Description of monument and accessories set at corner location:***

At the position determined by survey, I set a 2 1/2"x30" aluminum pipe with attached 3" aluminum cap, 28 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I set new reference monuments:

A 5/8"x30" iron pin bears N52°45'E, 27.09 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S49°48'E, 60.46 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears N48°30'W, 25.80 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

From which I scribe a new bearing tree:

A 13" diam. Juniper bears S53°35'W, 192.31 feet, marked C1/4S32 BT.

I used solar bearings to the center of the BT and EDM distances measuring to a 50d nail driven in the side center at the root crown of the BT. I used solar bearings and EDM distances to tie the references. Built mound of stone around monument.

Date: June 20, 1998

Office of SURVEYOR County of GRANT  
State of OREGON I hereby certify that the within instrument was filed in this office  
for record on the 3<sup>rd</sup> day of July, 1998.  
David D. Bennett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)