

CORNER RESTORATION


CORNER: W1/4 Sec 34 TWP 13S. RANGE 31E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently resurveyed & monumented by
Robert D. Bagett, County Surveyor, Dec. 19, 1973,
See corner restoration records.

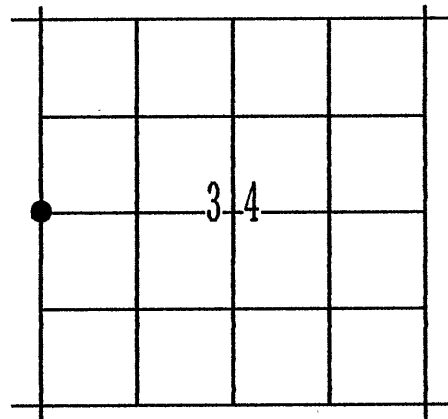

ORIGINAL DESCRIPTION: Set Stone 20x14x6 for 1/4 Sec. corner.

I did not find the original stone in 1973. My record states:
The position of the 1/4 corner was established by means of single proportionate measure between the accepted section corners 1/2 mile North and South.

At point for 1/4 corner: Set a 1½"x30" iron pipe 26 inches in the ground, with a brass cap marked as shown: (marks shown below)

from which NEW BEARING TREES

A 20" Juniper bears S15°W., 173.5 feet, mkd. 1/4 S33 CS BT.

A 8" Juniper bears N46°W., 115.3 feet, mkd. X CS BT.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
J.L. Watson
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

MAR 2 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST:

Jeremy Russell

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1989
ROBERT D. BAGETT
598

Renewal Date 12/31/95

February 3, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with a 2½" Grant County Surveyor brass cap marked as shown below, surrounded by a mound of stone, 3 ft. base to top of cap.

From which:

A Juniper 20"diam., bears S15°W, 173.5 ft. to face of blaze, marked 1/4 S33 CS BT.

A Juniper 10"diam., bears N46°W, 115.3 ft. to face of blaze, marked X CS BT.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1973 is in good condition.

MONUMENT MARKED

From which: I SCRIBE NEW BEARING TREES:

A Juniper 5"diam., bears N18°E, 34.6 ft. marked X CSBT.

A Juniper 6"diam., bears S62°E, 39.9 ft. marked X CSBT.

GRANT COUNTY
SURVEYOR
T13S R31E

1/4
S33 | S34
1973
OPLS 598

Repaired mound of stone 4 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.