


CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Not previously established



Description of corner evidence found:

Not previously established

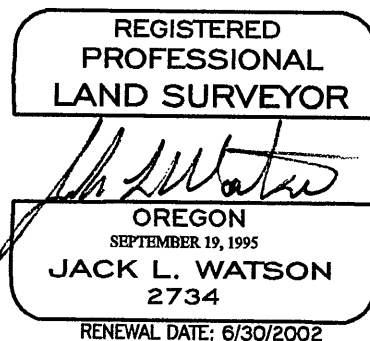

See Grant County Survey No. 1593

Description of monument and accessories set at corner location:

At the position determined by survey, I set a 5/8"x24" iron pin with attached 2" aluminum cap, driven 26" into the ground, the cap is stamped as shown in the diagram.

From which I set new reference monuments:

A 5/8"x24" iron pin bears N69°09'E, 27.70 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC., RP1

A 5/8"x24" iron pin bears S42°14'E, 27.20 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC., RP2

A 5/8"x24" iron pin bears S47°14'W, 28.00 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC., RP3

A found 5/8" iron pin bears N12°10'W, 42.39 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC. See Survey No. 1470.

I used a total station to tie references. The bearings are based on Survey No. 1593.

Date: April 19, 2001

Office of GRANT Co. Surveyor County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 27 day of APRIL, 2001.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)