


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
NONE

T. 13S., R. 31E.

W1/16
C — C
S36
1996
OPLS2734

Description of corner evidence found:
NONE

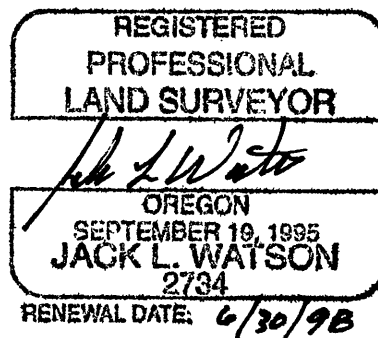

Description of monument and accessories set at corner location:
At the corner position I set a 2 1/2" x 30" aluminum pipe with attached 2 1/2" aluminum cap, set 26 inches in the ground. The cap is stamped as shown in the diagram.

From which I scribe new bearing trees:
A 6" diam. Juniper bears N60°E, 34.98 feet, marked CW1/16S36BT.
A 4" diam. Juniper bears N76°W, 14.51 feet, marked X BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 20° E. declination, with a washer stamped PLS 2734 nailed into the face. Raised mound of stone 3' base to top of cap. See Grant County Land Partition No.96-19.

Witnesses: Jack Watson
Carl Stout

Date: Aug. 13, 1996

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 5th day of OCT, 1995.
Robert O. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)