


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: John B. David, Deputy Surveyor, under Contract No. 131, dated June 8, 1869.

Surveyor General Record States: Set stone 16x10x8 inches, for 1/4 section corner.

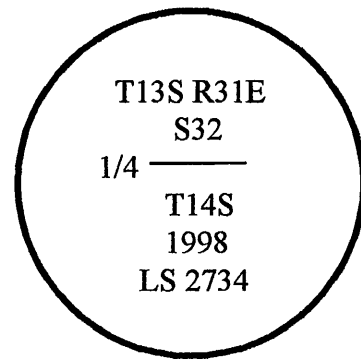

Description of corner evidence found:

No evidence was found of the original corner stone. There has been road building and land clearing activities in the immediate area.

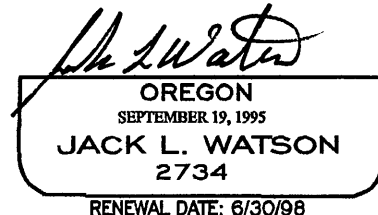

See Record Map of Survey No. 1482.

Description of monument and accessories set at corner location:

At the position determined by single proportionate measure, I set a 2 1/2"x30" aluminum pipe with attached 3" aluminum cap, 28 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I set new reference monuments:

A 5/8"x30" iron pin bears N64°E, 23.27 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears N24°W, 12.26 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

From which I scribe a new bearing trees:

A 19" diam. Juniper bears N64°E, 113.91 feet, marked 1/4S32 BT.

A 10" diam. Juniper bears N24°W, 31.20 feet, marked 1/4S32 BT.

I used a magnetic compass, with 20° east variation, to center of BT's and steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's. I used a magnetic compass, with 20° east variation and steel tape to tie references. Built mound of stone around monument.

Date: June 20, 1998

Office of SURVEYOR County of GRANT
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 3rd day of July, 1998.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)