

CORNER RESTORATION


CORNER: NW Sec 24 TWP 13S. RANGE 32E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently resurveyed and monumented
by Robert D. Bagett, County Surveyor, Mar. 11, 1978,
See corner restoration records.

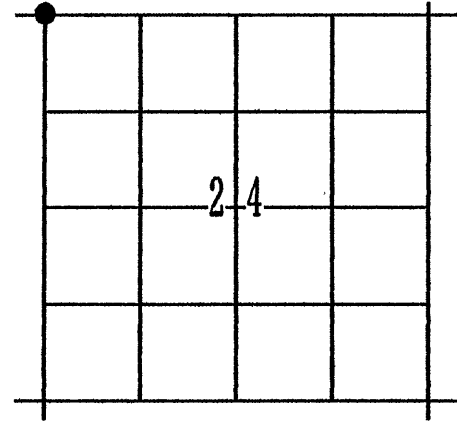

ORIGINAL DESCRIPTION: set stone 15x9x7 for corner to Secs. 13, 14, 23, & 24.

I did not find the original stone in 1978, my record states:

I did not find the original corner stone or the stone set by Michael Spears in 1909, however the corner is not lost as I used Spear's record and his found monuments to the East to establish this corner.

At the corner point: Set 1½"x30" iron pipe 30" in the ground with brass cap marked as shown. (marks shown below).



RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

APRIL 20, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: *Steven J. Follweiler*

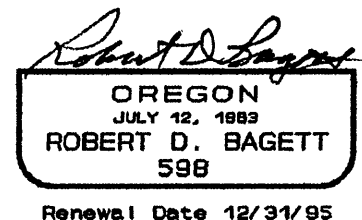

March 6, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with a 2½" Grant County Surveyor brass cap marked as shown below, set in a mound of stone.

Corner is in a gate of a fence running North and South, and is 2' south of corner of fences running North, East and South.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1978 is in good condition.

MONUMENT MARKED

From which: I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 1
1995 OPLS 598.

A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 2
1995 OPLS 598.

A 5/8"x30" iron pin, bears S45°W, 15.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 3
1995 OPLS 598.

A 5/8"x30" iron pin, bears N45°W, 15.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 4
1995 OPLS 598.

GRANT COUNTY
SURVEYOR

T13S R32E

S14 | S13

S23 | S24

1978
OPLS 598

Used mag. compass with 20°E var. and a steel tape.