

CORNER RESTORATION


CORNER: NE Sec 24 TWP 13S. RANGE 32E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently resurveyed & monumented by
Robert D. Bagett, County Surveyor, Mar. 13, 1978,
See corner restoration records.

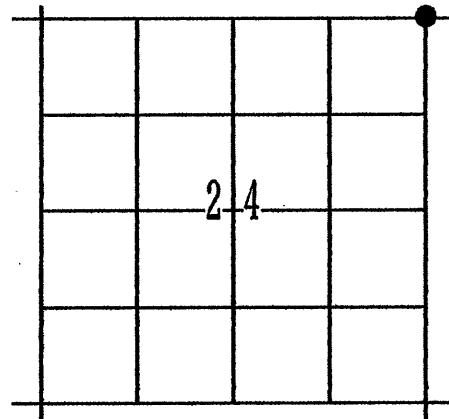

ORIGINAL DESCRIPTION: set 18x10x8 stone for Sec. corner to Secs. 18, 13, 19, 24.

I did not find the original stone in 1978, my record states:

I therefore establish the corner at single proportionate measure on the range line, between nearest found corners.

At the corner point: Set 1½"x30" iron pipe 22" in the ground with brass cap marked as shown. (marks shown below).



RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

APRIL 21, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: Steven D. Follweiler

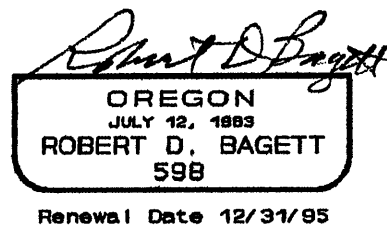

March 7, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with a 2½" Grant County Surveyor brass cap marked as shown below, set in a mound of stone.

Corner is 3' north of corner of fences running North, South, and West.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1978 is in good condition.

MONUMENT MARKED

From which: I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 1
1995 OPLS 598.
A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 2
1995 OPLS 598.
A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 3
1995 OPLS 598.
A 5/8"x30" iron pin, bears N45°W, 35.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 4
1995 OPLS 598.

GRANT COUNTY
SURVEYOR

T13S
R32E R33E

S13	S18
S24	S19
1978	
OPLS 598	

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.