

CORNER RESTORATION


CORNER: W $\frac{1}{4}$ Sec 24 TWP 13S. RANGE 32E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently resurveyed & monumented by
Robert D. Bagett, County Surveyor, April 19, 1978,
See corner restoration records.

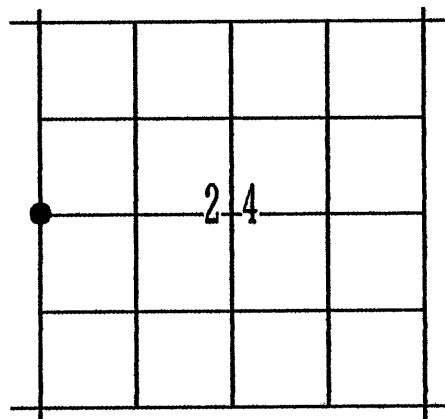

ORIGINAL DESCRIPTION: set stone 17x9x6 for $\frac{1}{4}$ Sec. corner.

I found the original stone disturbed in 1978, my record states:

Found 18x9x6 stone marked 1/4 in fence rockjack.
Since the corner stone had been moved and no other evidence of its original position was found, I establish the $\frac{1}{4}$ corner at single proportionate measure and on line between section corners N. and S.

At the corner point: Set 1 $\frac{1}{2}$ "x30" iron pipe 30" in the ground with brass cap marked as shown. (marks shown below).

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

APRIL 20, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: Steven D. Follweiler

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Renewal Date 12/31/95

March 6, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1 $\frac{1}{2}$ " iron pipe with a 2 $\frac{1}{2}$ " Grant County Surveyor brass cap marked as shown below, set in a mound of stone.

Corner is in a fence running North and South, and is 77' north of corner of fences running North, East, and South.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1978 is in good condition.

MONUMENT MARKED

From which: I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.
A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598.
A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1995 OPLS 598.
A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1995 OPLS 598.

GRANT COUNTY
SURVEYOR

T13S R32E

$\frac{1}{4}$
S23 | S24

1978
OPLS 598

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.