

CORNER RESTORATION


CORNER: E 1/4 Sec 24 TWP 13S. RANGE 32E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently resurveyed & monumented by Robert D. Bagett, County Surveyor, Mar. 13, 1978, See corner restoration records.

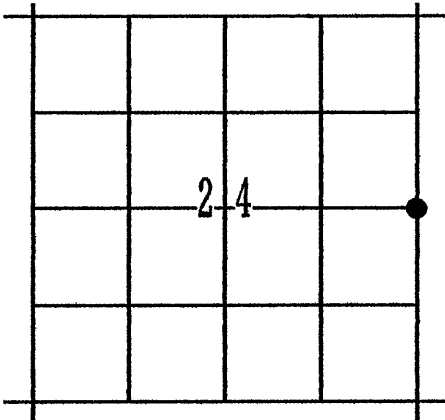

ORIGINAL DESCRIPTION: set 14x12x12 stone for 1/4 Sec. cor.

I did not find the original stone in 1978, my record states:

I establish the 1/4 corner at single proportionate measure on the range line between nearest found corners on the range line.

At the corner point: Set 1 1/2"x30" iron pipe 26" in the ground with brass cap marked as shown. (marks shown below).

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED
APRIL 21, 1995
OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
ATTEST: *Steven D. Follweiler*

REGISTERED
PROFESSIONAL
LAND SURVEYOR
Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598
Renewal Date 12/31/95

March 7, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1 1/2" iron pipe with a 2 1/2" Grant County Surveyor brass cap marked as shown below, set in a mound of stone.

Corner is 2' west of fence running North and South, and 8' North of corner of fences running North, East, and South.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1978 is in good condition.

MONUMENT MARKED

From which: I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.
A 5/8"x30" iron pin, bears S45°E, 12.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598. (set in E-W fenceline).
A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1995 OPLS 598.
A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1995 OPLS 598.

GRANT COUNTY
SURVEYOR
T13S
1/4
R32E | R33E
S24 | S19
1978
OPLS 598

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.