

CORNER RESTORATION


CORNER: NW Sec 25 TWP 13S. RANGE 32E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently resurveyed & monumented by
Robert D. Bagett, County Surveyor, Mar. 22, 1978,
See corner restoration records.

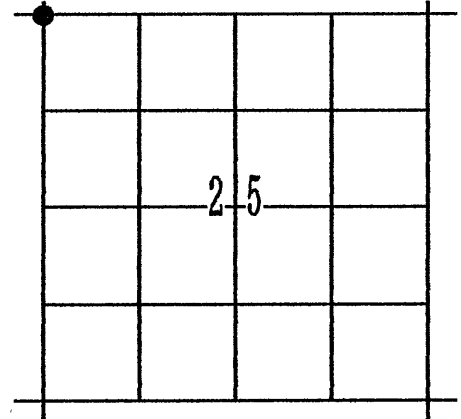

ORIGINAL DESCRIPTION: set stone 17x10x8 for cor. Secs. 23, 24, 25 & 26

I found the original stone disturbed in 1978, my record states:
Stone was in fence jack. Since the corner stone had been moved and no
other evidence of its original position could be found, I establish the
corner at double proportionate measure from found corners North-East-South
and West.

At the corner point: Set 1½"x30" iron pipe 32" in the ground with brass cap
marked as shown.

from which NEW BT's

A 6" juniper, bears S.58°W, 240.8 feet marked T.13S.,R32E., S26 CSBT.

A 9" juniper, bears N.76°W, 246.1 feet marked T.13S.,R32E., S23 CSBT.

A 17" juniper, bears S.35°E, 184.2 feet marked T.13S.,R32E., S25 CSBT.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

APRIL 20, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: Steven D. Follweiler

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1883
ROBERT D. BAGETT
598

Renewal Date 12/31/95

March 3, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with a 2½" Grant County Surveyor
brass cap marked as shown below, set in the center of a dirt road.
from which:

A Juniper 19" diam., bears S30°E, 184.2 ft. with partially healed over
blaze, scibing visible.

A Juniper 11" diam., bears S62°W, 240.8 ft. with partially healed over
blaze, scibing visible.

A Juniper 14" diam., bears N72°W, 246.1 ft. with partially healed over
blaze, scibing visible.

Measured to the face of the blazes of the found BT's.

Corner is 9' south of corner of fences running North, East and South.

Corner is 1.5' west of the west edge of a cattle guard, set 3" below the
surface of the road.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1978 is in good condition.

From which: I SET A NEW REFERENCE POINT:

A 5/8"x30" iron pin, bears N75°E, 30.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR RP 1
1995 OPLS 598., set in E-W fence.

MONUMENT MARKED
GRANT COUNTY
SURVEYOR

T13S R32E

S23 | S24

S26 | S25

1978

OPLS 598

Used mag. compass with 20°E var. and a steel tape.

R-21