

CORNER RESTORATION


CORNER: NE Sec 25 TWP 13S. RANGE 32E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently resurveyed & monumented by
Robert D. Bagett, County Surveyor, April 19, 1978,
See corner restoration records.

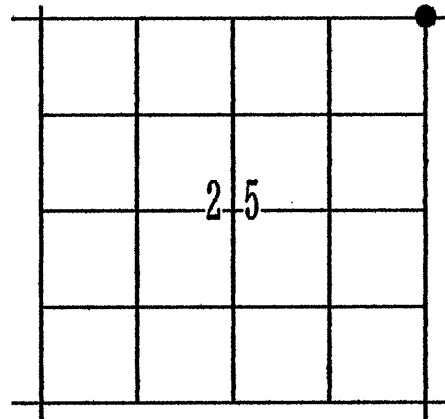

ORIGINAL DESCRIPTION: set 14x12x8 stone for Sec. corner to Secs. 19, 24, 25, 30.

I did not find the original stone in 1978, my record states:

I establish the corner at single proportionate distance between the nearest found corners on the range line.

At the corner point: Set 1½"x30" iron pipe 30" in the ground with brass cap marked as shown. (marks shown below).



RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

APRIL 21, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: Steven D. Follweiler



Renewal Date 12/31/95

March 7, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with a 2½" Grant County Surveyor brass cap marked as shown below.

Corner is 15' northwest of corner of fences running North, East and West, and 20' northwest of corner of fences running East, South, and West.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1978 is in good condition.

MONUMENT MARKED

From which: I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

A 5/8"x30" iron pin, bears S45°E, 21.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598. (set in E-W fenceline).

A 5/8"x30" iron pin, bears S45°W, 20.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1995 OPLS 598. (set in E-W fenceline).

A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1995 OPLS 598.

GRANT COUNTY
SURVEYOR

T13S
R32E R33E

S24	S19
S25	S30

1978
OPLS 598

Used mag. compass with 20°E var. and a steel tape.