

CORNER RESTORATION


CORNER: N $\frac{1}{4}$ Sec 35 TWP 13S. RANGE 32E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently remonumented by Robert D. Bagett, County Surveyor, Mar. 22, 1978, See corner restoration records.

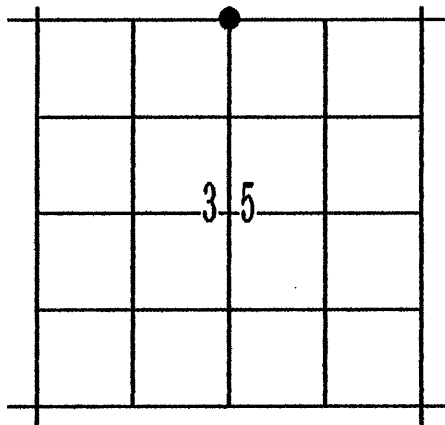

ORIGINAL DESCRIPTION: set stone 16x8x8 for $\frac{1}{4}$ sec. corner.

I found the original stone in 1978, my record states:

At the corner point: Set 1 $\frac{1}{2}$ "x30" iron pipe 26" in the ground with brass cap marked as shown. (marks shown below).

RESTORATION BY, STAMP AND DATE:



R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

APRIL 20, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *Steven D. Follweiler*



Renewal Date 12/31/95

March 6, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1 $\frac{1}{2}$ " iron pipe with a 2 $\frac{1}{2}$ " Grant County Surveyor brass cap marked as shown below, set in a mound of stone.

Corner is 63' north of corner of fences running East and South, and 80' north of corner of fences running North, South, and West.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1978 is in good condition.

MONUMENT MARKED

From which: I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598.

A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1995 OPLS 598.

A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1995 OPLS 598.

GRANT COUNTY
SURVEYOR

T13S R32E

S26

$\frac{1}{4}$ S35

1978

OPLS 598

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.