

CORNER RESTORATION


CORNER: W $\frac{1}{4}$ Sec 36 TWP 13S. RANGE 32E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently remonumented by Robert D. Bagett, County Surveyor, Mar. 22, 1978, See corner restoration records.

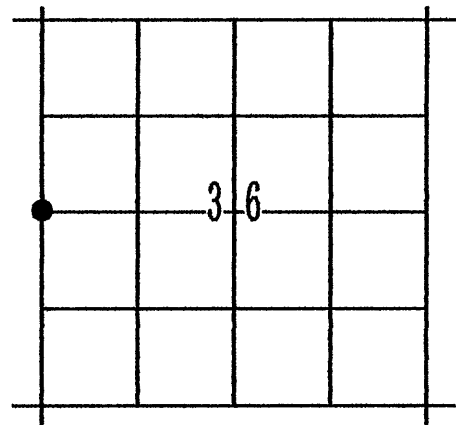

ORIGINAL DESCRIPTION: set stone 15x10x10 for $\frac{1}{4}$ Sec. corner.

I found the original stone in 1978, my record states:

At the corner point: Set 1 $\frac{1}{2}$ "x30" iron pipe 24" in the ground with brass cap marked as shown. (marks shown below).

From which:

A 18" juniper bears N.30°W., 84.4 ft. marked $\frac{1}{4}$ S35 CSBT.



RESTORATION BY, STAMP AND DATE:

R.D. Bagett
J.L. Watson
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

APRIL 21, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: *Steven D. Follweiler*

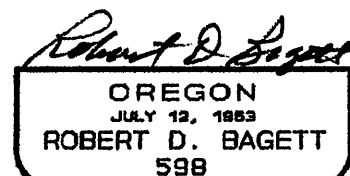

Renewal Date 12/31/95

March 8, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1 $\frac{1}{2}$ " iron pipe with a 2 $\frac{1}{2}$ " Grant County Surveyor brass cap marked as shown below, set in a mound of stone.

A Juniper 23"diam., bears N30°W, 84.4 ft. with partially healed over blaze, scibing visible. (meas. to face of blaze).

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1978 is in good condition.

MONUMENT MARKED

From which: I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598.

A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1995 OPLS 598.

GRANT COUNTY
SURVEYOR

T13S R32E

$\frac{1}{4}$
S35 | S36
1978
OPLS 598

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.