

CORNER RESTORATION


CORNER: SW Sec 31 TWP 13S. RANGE 32E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently remonumented by Robert D. Bagett, County Surveyor in 1969, See corner restoration records.

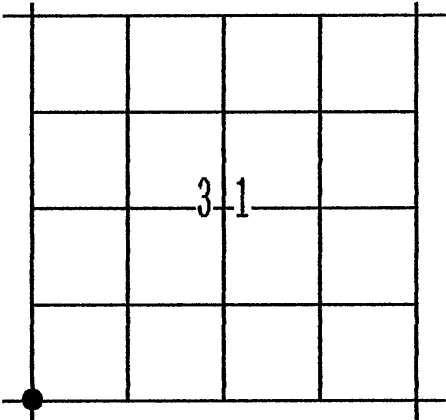

ORIGINAL DESCRIPTION: Set Stone 22x12x8 for cor. to tps. 13 & 14S., RS., 31 & 32 E., in mound of stone.

I found the original stone in 1969, my record states:

I set a 1½"x30" brass capped iron pipe 24" in the ground and placed orig. cor. stone South & alongside.

From which

New Bt's

A 16" Juniper bears N30°W., 17.3 feet, Scribed T13SR31E S36 BT.

A 15" Juniper bears N43°E., 66.2 feet, Scribed T13SR32E S31 BT.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

MAR 2, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: Jeremy Russell

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1989
ROBERT D. BAGETT
598

Renewal Date 12/31/95

February 24, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with a 2½" Grant County Surveyor brass cap marked as shown below, set in a mound of stone.

From which:

A Juniper 18"diam., bears N46°E, 66.2 ft. with partially healed over blaze, scibing visible.

A Juniper 22"diam., bears N30°W, 17.3 ft. with partially healed over blaze, scibing visible.

Corner is 2' east of corner of fences running North, East, and West.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1969 is in good condition.

MONUMENT MARKED

From which: I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598.

GRANT COUNTY
SURVEYOR

T13S
R31E R32E
S36 S31

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.

S6
T14SR32E
1969
LS 598