


# CORNER RESTORATION

NW Cor.  
**CORNER** Sec. 4 **TWP** 13 S. **RANGE** 33 E.

**ORIGINAL SURVEY BY:** John B. David

**CONTRACT NUMBER:** 131

**CONTRACT DATE:** June 8, 1869

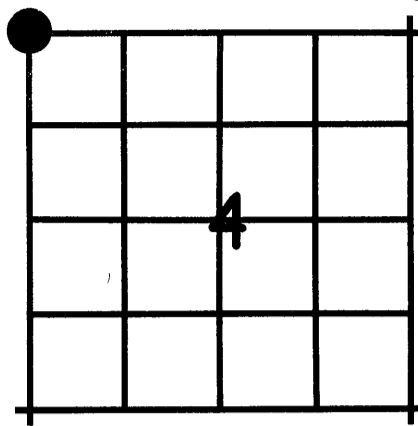

**ORIGINAL DESCRIPTION:**

Set Stone 17x9x6 for corner to Sections 33 and 34. Vernon Glaze, about 1920 in Survey No. B-23 recorded in surveyors record Book 2, Page 11-12 states: To point for N.E. corner of Section 5, T. 13 S., R. 33 E., W.M., which being obliterated I re-established, with a stone 16"x5"x4" set in a mound of stone, chiseled 4 notches East and 2 notches West.

**RESTORATION BY, STAMP AND DATE:**

R. D. Bagett  
 J. L. Watson  
 K. J. Workman

**RECEIVED AND  
 FILED**

**JAN 3 1989**

OFFICE OF COUNTY SURVEYOR  
*Robert D. Bagett*  
 Attest: *John L. Watson*

REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR

*Robert D. Bagett*  
 OREGON  
 JULY 12, 1963  
 ROBERT D. BAGETT  
 598

Grant County Surveyor

December 8, 1988

**EVIDENCE FOUND:**


I found the stone set by Vernon Glaze, 17"x5"x5" marked with 4 notches on East and 2 notches on West, at a fence corner with fences running South, East and West. I accept the position of this stone for the section corner.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**

Show how trees are scribed and basis of bearings, including compass var.

At the Corner Points: Set a 1½"x30" Galv. iron pipe 24 inches in the ground with attached Brass Cap marked as shown: From which I set NEW REFERENCE POINTS:

**MONUMENT MARKED**

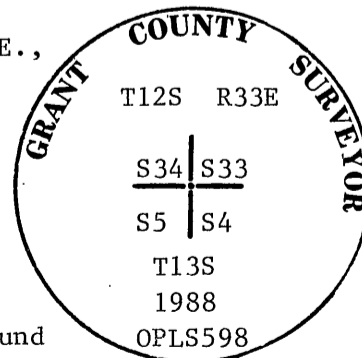

A 5/8"x30" iron pin, with attached 1½" Alum Cap, bears N. 45° E., 30.00 ft., marked Grant County Surveyor RP1 1988.  
 A 5/8"x30" iron pin, with attached 1½" Alum Cap, bears S. 45° E., 30.00 ft., marked Grant County Surveyor RP2 1988.  
 A 5/8"x30" iron pin, with attached 1½" Alum Cap, bears N. 45° W., 30.00 ft., marked Grant County Surveyor RP4 1988.  
 I SCRIBE A NEW BEARING TREE: A Juniper 14 inches Diam. bears S. 58° W., 124.5 ft., marked T. 13 S., R. 33 E., S5 CSBT.  
 Buried marked stone East and alongside iron pipe. Raised a mound of stone 4 foot base to top of cap.

Used magnetic compass with 20° E. variation and steel tape for measurements to reference points. I measured to a 50d nail driven inside center at the root crown of the BT. Painted scribing blazes with red timber marking paint and attached County Surveyor BT tag to bearing tree.