


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


W1/16, Sec. 2, T13S,R33E,W.M.

NONE.

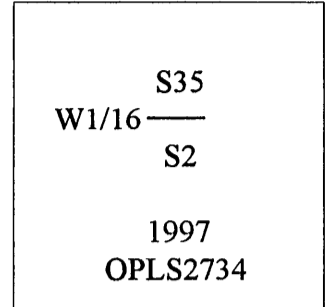

Description of corner evidence found:

NONE.

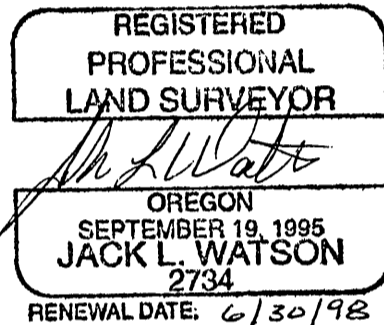

See Land Partition Plat No. 97-02

Description of monument and accessories set at corner location:

I establish this corner position at the mid-point and on line between the NW corner of Section 2 and the N1/4 corner of Section 2. At the corner position I set a 2 1/2" x 30" aluminum pipe with attached 2 1/2" aluminum cap, set 24 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I set these references:

A 5/8"x30" iron pin, bears S23°E, 21.79 feet, with attached red plastic cap marked CORNERSTONE SURVEYING, INC.

A 5/8"x30" iron pin, bears S34°W, 24.92 feet, with attached red plastic cap marked CORNERSTONE SURVEYING, INC.

I used a steel tape and magnetic compass, with 20° E. declination, to tie the references.

Date: January 14, 1997

Office of SURVEYOR County of GRANT  
 State of OREGON, I hereby certify that the within instrument was filed in this office  
 for record on the 10<sup>th</sup> day of FEB, 1995-1997  
Robert D. Baggett by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)