

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by : John B. David, Deputy Surveyor
under Contract No. 131 dated June 8, 1869.

Surveyor General Record States: Set basalt stone 16x9x7 for 1/4 section
corner.

T12S R33E
S35
1/4 —
S2
T13S
1997
OPLS2734

Description of corner evidence found:

None, this corner falls along a fence line with many rock jacks. I believe the original corner stone
has been placed in the fence. I searched the rock jacks in the immidiate area.

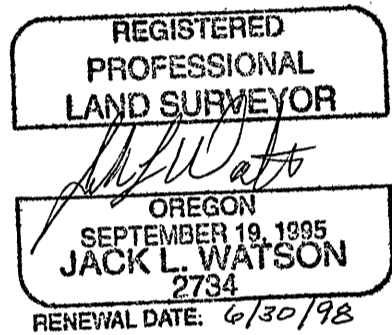

See Land Partition Plat No. 97-02

Description of monument and accessories set at corner location:

I establish this corner position by single proportionate measurement between found corners 1/2
mile west and 1 1/2 miles east. At the corner position I set a 2 1/2" x 30" aluminum pipe with
attached 2 1/2" aluminum cap, set 24 inches in the ground, surrounded by a mound of stone. The
cap is stamped as shown in the diagram.

From which I set these references:

- A 5/8"x30" iron pin, bears N45°E, 18.00 feet, with attached red plastic cap marked
CORNERSTONE SURVEYING, INC.
- A 5/8"x30" iron pin, bears S45°E, 20.00 feet, with attached red plastic cap marked
CORNERSTONE SURVEYING, INC.
- A 5/8"x30" iron pin, bears S45°W, 18.00 feet, with attached red plastic cap marked
CORNERSTONE SURVEYING, INC.
- A 5/8"x30" iron pin, bears N45°W, 20.00 feet, with attached red plastic cap marked
CORNERSTONE SURVEYING, INC.

I used a steel tape and magnetic compass, with 20° E. declination, to tie the references.

Date: January 14, 1997

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 10th day of FEB, ~~1995~~ 1997
Robert D. Bryant by
(COUNTY OFFICIAL) (DEPUTY)