

CORNER


RESTORATION

CORNER: W $\frac{1}{4}$ Sec 2 TWP 13S. RANGE 33E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

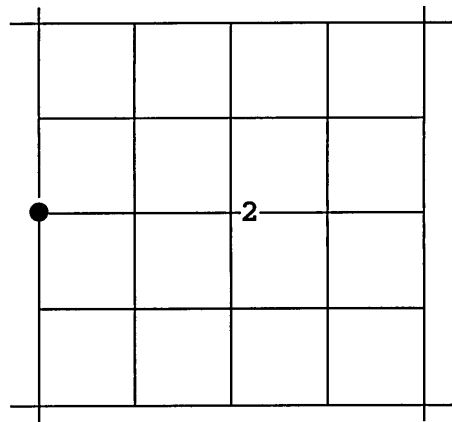

ORIGINAL DESCRIPTION: Set Stone 18x10x8 for 1/4 Sec. Corner.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney

RECEIVED AND
FILED

July 26, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *John B. David*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Renewal Date 12/31/95

June 5, 1995

EVIDENCE FOUND: I did not find the original stone at the West 1/4 corner of Section 2. We performed a diligent search for the corner. The position of this 1/4 corner is not lost however. The plat of Cleaver Cozart Addition and Prairie City Land Company's Second Addition indicates the position of the 1/4 corner. In the course of performing many private surveys in these two additions I have developed the west boundary of these additions and the north boundary of Cleaver Cozart Addition. The northwest corner of Cleaver Cozart Addition is identical with the West 1/4 corner of Section 2. I held the plat record bearing of S.89°41'W., along the North boundary of Cleaver Cozart Addition from the found monument at the NE corner of that addition, the distance along this line varies only 0.25 foot from the Cleaver Cozart Addition plat record. This position is harmoniously related to the lots and blocks of this addition.

See Record Map of Survey No. 1370.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 5/8"x30" iron pin, 32" in the ground, with attached Bagett - Griffith & Blackman aluminum cap marked as shown.

From which I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached yellow plastic cap marked BGB SURVEY MARKER.

A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with attached yellow plastic cap marked BGB SURVEY MARKER.

A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached yellow plastic cap marked BGB SURVEY MARKER.

A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with attached yellow plastic cap marked BGB SURVEY MARKER.

MONUMENT MARKED

BGB SURVEY
MARKER

T13S R33E
 $\frac{1}{4}$

S3 | S2

1995

OPLS 598

Raised a mound of stone 1 ft. base to top of cap. Used true bearings, (solar observation), and an electronic distance measuring device.