


CORNER RESTORATION

CORNER EAST 1/4 COR.
SECTION 10 TSP. 135 RANGE 33E

ORIGINAL SURVEY BY:

CONTRACT NUMBER:

CONTRACT DATE:

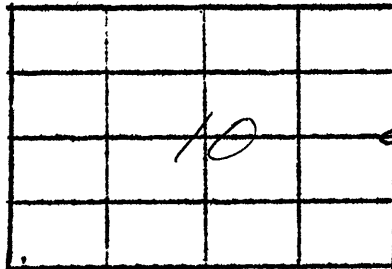

ORIGINAL DESCRIPTION:

RESTORATION BY AND DATE:


BAGETT & GRIFFITH SURVEYING *MARCH 17, 1969*

EVIDENCE FOUND: NO EVIDENCE OF THE ORIGINAL CORNER WAS FOUND ON THE GROUND. THE BEST AVAILABLE EVIDENCE OF ITS LOCATION IS THE RECORD BEARINGS & DISTANCES GIVEN ON THE PLAT OF CLEVER COZART ADDITION TO THE CITY OF PRAIRIE CITY. WE THEREFORE PLACE THE 1/4 COR. AT PROPORTIONATE DISTANCE BETWEEN THE FOUND SECTION CORNERS TO THE NORTH & TO THE SOUTH AND AT A POSITION TO SATISFY THE RECORD BEARINGS OF THE CLEVER COZART ADDITION PLAT.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
SHOW HOW TREES ARE SCRIBED AND BASIS OF BEARING, INCLUDING COMPASS VARIATION.
SET A 2" X 30" IRON PIPE 18" IN THE GROUND, SURROUND PIPE WITH A MOUND OF STONE.

BRASS CAP
MONUMENT STAMPED:

* RESET BY BGA 9/93

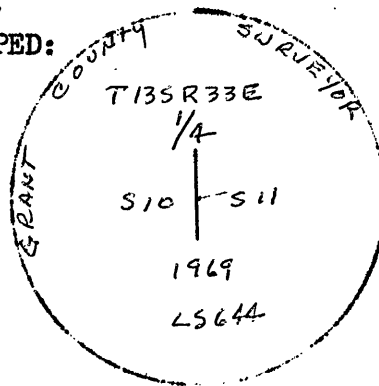

REGISTERED
OREGON
LAND SURVEYOR

Duane I. Griffith

JULY 10, 1964
DUANE I. GRIFFITH
644