

CORNER RESTORATION


CORNER: W $\frac{1}{4}$ Sec 18 TWP 13S. RANGE 33E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently remonumented by Robert D. Bagett, County Surveyor, Aug. 4, 1976, See corner restoration records.

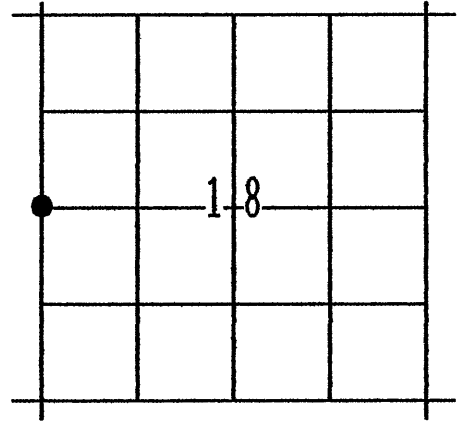

ORIGINAL DESCRIPTION: Set stone 15x12x10 for 1/4 sec. cor.

I found the original stone in 1976, my record states:

At the corner point: Set 1 $\frac{1}{2}$ "x30" iron pipe 12" in the ground on solid rock, in a large mound of stone with brass cap marked as shown... (marks shown below).

Fence - 4 ft. West of corner bears North and South. Spike in power pole brs. N.56°E., 31.65 ft. Spike in post of rock jack brs. N.14°W., 28.45 ft.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

APRIL 20, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: *Steven D. Follweiler*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Renewal Date 12/31/95

March 6, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1 $\frac{1}{2}$ " iron pipe with a 2 $\frac{1}{2}$ " Grant County Surveyor brass cap marked as shown below, set in a mound of stone. The 1976 bearing objects have been destroyed.

Corner is 10' east of fence running North and South, and 23' southeast of corner of fences running North and West.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1976 is in good condition.

MONUMENT MARKED

From which: I SET NEW REFERENCE POINTS:

GRANT COUNTY
SURVEYOR

A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

T13S

A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598.

|

A 5/8"x30" iron pin, bears S45°W, 12.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1995 OPLS 598. (set in a N-S fenceline)

R32E | R33E
S13 | S18

A 5/8"x30" iron pin, bears N45°W, 15.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1995 OPLS 598. (set in a N-S fenceline)

1976
OPLS 598

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.