


CORNER RESTORATION

CORNER NW cor 29 TWP 13 S RANGE 33 E

ORIGINAL SURVEY BY: JOHN B. DAVID

CONTRACT NUMBER: 131

CONTRACT DATE: JUNE 8, 1869

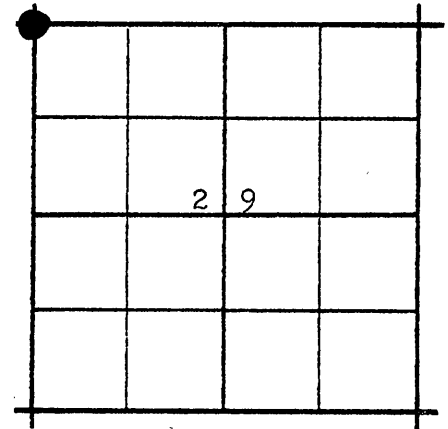

ORIGINAL DESCRIPTION:

Set stone 18 x 10 x 7 for corner to Sections 19, 20, 29, and 30.

RESTORATION BY, STAMP AND DATE:

OREGON EAST ENGINEERING, INC.
P.O. BOX 277
MT. VERNON, OREGON

NOVEMBER, 1977

RECEIVED AND FILED

NOV 25 1977
John Liveira
JOHN LIVEIRA, County Clerk

By _____ Deputy

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Douglas M. Ferguson

OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

EVIDENCE FOUND:

Found original 18 x 10 x 7 stone lying, partially buried, next to an old fence corner post. Phil Kuhl stated that this particular stone was shown to him by his father around 1930 and that it has not been moved since that time. Position was accepted.


DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

Set a 2 1/2" x 30" galvanized iron pipe and brass cap marked as shown in the ground. Set a treated 1 1/4" diam. post next to the pipe. No bearing trees were available.

Compass variation 20° E.

MONUMENT MARKED

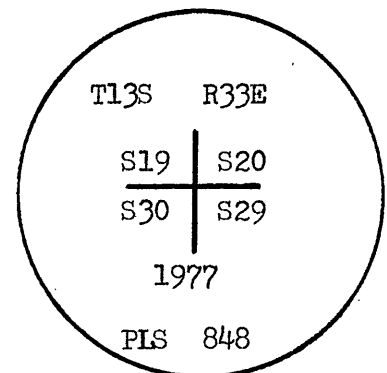

Complete and File with Office of the Grant
County Surveyor, Grant County, Oregon,
Courthouse, Canyon City, Oregon 97820