

RECORD OF LAND CORNER MONUMENTATION


CORNER: SE Cor. Sec. 29, Twp. 13S., R.33E., W.M.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

SUBSEQUENT SURVEY BY: Douglas M. Ferguson 1977

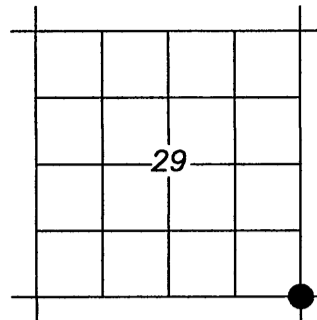

ORIGINAL G.L.O. DESCRIPTION: Set Stone 16x9x6 for corner to Secs. 29, 28, 32 and 33.

1977 SURVEY BY DOUGLAS M. FERGUSON: Found original 16x9x6 stone lying loose on a slope. Found remains of a mound of stone close by the corner stone. Position was accepted due to its harmony with other found corners.

Set a 2½"x30" galvanized iron pipe and brass cap marked as shown in the ground. Raised a mound of stones up around the pipe from which:

A Juniper, 10" in diam., bears N22°W a distance of 37.5 ft. scribed T13S R33E S29 BT. Attached a bearing tree sign to the BT.

EVIDENCE FOUND: Found 2½" brass cap in 3 ft. scattered mound of stone. Pipe and cap were leaning W'ly 0.5 ft., projecting 18" above ground.

A multi-trunk Juniper, 21" diam., bears N.24°W., 37.27 ft., no scribing visible in healed blazes. BT tag attached. Measurements taken to S. trunk.

DESCRIPTION OF MONUMENT AND ACCESSORIES SET:

Straightened and lowered monument. Rebuilt 3 ft. mound of stone, base to top of cap. Cap is projecting approx. 4" above stone mound. Attached new Grant County Surveyor BT tags to BT's with new bearings and distances. Corner is approx. 18.5 ft. S. of fence running East & West. Set a 3 ft. steel u-post approx. 2 ft. E. of corner monument.

From which, I TAKE A NEW BEARING TREE:

A Juniper, 22½" diam., bears N.81°59'W., 25.1 ft. I did not scribe this BT.


From which, I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin bears N.40°45'E., 28.82 ft., with attached alum. cap mkd. GRANT COUNTY RP 1.

A 5/8"x30" iron pin bears S.44°12'E., 32.97 ft., with attached alum. cap mkd. GRANT COUNTY RP 2.

A 5/8"x30" iron pin bears S.33°47'W., 21.81 ft., with attached alum. cap mkd. GRANT COUNTY RP 3.

A 5/8"x30" iron pin bears N.70°30'W., 45.61 ft., with attached alum. cap mkd. GRANT COUNTY RP 4.

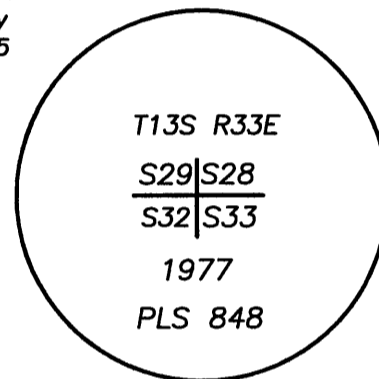

Used RTK GPS to measure RP's and BT's. Distances to new BT's measured to a 40d nail driven side-center at root crown of BT's. Bearings based on a GPS observation taken at corner point.

STATE PLANE COORDINATES (3601 ORN)

Reference Datum: NAD83(2011) from an OPUS Solution

Northing: 273,306.2 ft.
 Easting: 8,657,561.2 ft.
 Ellip. Ht: 3,738.6 ft.

RESTORATION BY:

Michael C. Springer, PLS
 Grant County Surveyor
 Marcus R. Teague, Technician
 217 N. Canyon Blvd.
 John Day, OR, 97845

Surveyed December 20, 2018

**RECEIVED AND FILED
 GRANT COUNTY SURVEYOR**

MAR 8 2019

BY:

**REGISTERED
 PROFESSIONAL
 LAND SURVEYOR**

OREGON
 JULY 9, 2002
 MICHAEL C. SPRINGER
 #70918

EXPIRES: 6/30/2020