


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner # C-20

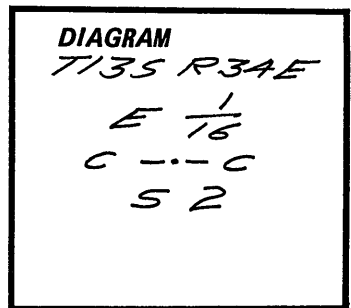

Description of corner evidence found:

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 2 1/2" x 30" aluminum pipe with 3" aluminum cap rising 12" in stone mound.

Cap marked

As witnesses:

A 11" Ponderosa Pine brs. N31°E 46.1'
marked CE 1/16 S2 BT.

A 8" Fir brs. S33°E 22.4'
marked CE 1/16 S2 BT.

E $\frac{1}{16}$
C --- C
S 2
1986
LS 1020

I hereby certify the above corner point was established as described in July, 1986, U.S.F.S. bearing tree signs were placed on all BTs and a 6" red band was painted around each BT.

Office of.....SURVEYOR..... County of.....CLATSOP.....

State of.....OREGON....., I hereby certify that the within instrument was filed in this office

for record on the.....3 day of.....Sept....., 1986

.....Robert D. Hayes..... by.....
(COUNTY OFFICIAL) (DEPUTY)

