

CORNER

RESTORATION


CORNER: SE Sec 9 TWP. 13S. RANGE 34E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

Subsequently resurveyed & monumented by
Michael Spears, County Surveyor, July 28, 1911,
See Surveyor's Record Book 1 Page 58.

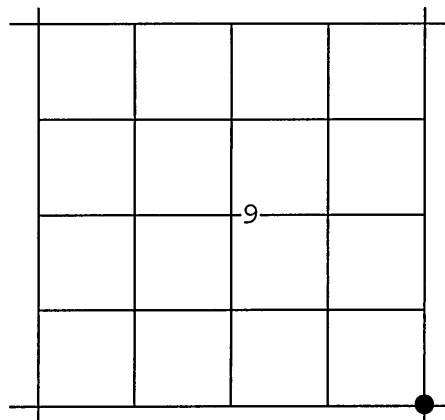

ORIGINAL DESCRIPTION: Set Stone 20x12x6 for corner to Secs. 9, 10, 15 & 16.

Spears' record: ...I decide that the point testified to by Mr. Bates to be the original position of the SW cor. Sec. 10, T.13, R.34E., and I have set a rock marked with 4 notches on South and 3 notches on the East and C S chiseled thereon...

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney

RECEIVED AND
FILED

NOV. 6, 1996
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *Jeremy Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

RENEWAL DATE 12/31/97

September 30, 1996

Grant County Surveyor

EVIDENCE FOUND: No evidence of the original corner stone set by David was found. Found a basalt stone 14"x11"x7" marked with 4 grooves and CS on the south face and 3 grooves on the east face firmly set, I accept this stone as the section corner.

Corner of fences running North, East, and West is 1' north of corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 30" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which: I SET NEW REFERENCE POINTS:


A 5/8"x30" iron pin, bears N70°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1996 OPLS 598.

A 5/8"x30" iron pin, bears S20°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1996 OPLS 598.

A 5/8"x30" iron pin, bears S70°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1996 OPLS 598.

A 5/8"x30" iron pin, bears N20°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1996 OPLS 598.

MONUMENT MARKED

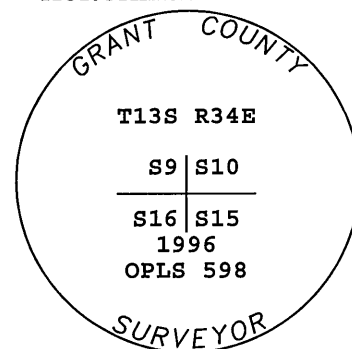

Buried marked stone South and alongside iron pipe, raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.