

RECEIVED AND
FILED

OCT 9 1973

CORNER RESTORATION

JOHN LIVEIRA, County Clerk


Carlene Lemon
By Deputy

E. $\frac{1}{4}$ Cor.
CORNER Sec. 22 TWP 13S., RANGE 34E., W.M.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

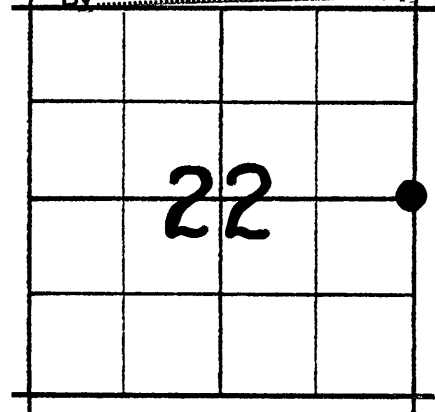

ORIGINAL DESCRIPTION:

40.00 Set stone 14x9x6 for $\frac{1}{4}$ sec. cor.

RESTORATION BY, STAMP AND DATE:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett

OREGON
JULY 12, 1963
ROBERT D. BAGGETT
598

October 1, 1973

Grant County Surveyor

EVIDENCE FOUND:

Found the original $\frac{1}{4}$ corner, a basalt stone 18x10x5 inches marked $\frac{1}{4}$ on west face and firmly set in a large mound of stone.

This $\frac{1}{4}$ corner was also found by Joseph Reece, County Surveyor, on February 26, 1903. Recorded on page 103 Surveyors Record Book A.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: Set a $1\frac{1}{2}$ "x30" iron pipe with brass cap marked as shown:

MONUMENT MARKED

Pipe is set 26" in the ground. I buried the original corner stone East and alongside the pipe, and surrounded pipe with a mound of stone to top of cap.
No bearing trees available.

See Map of Survey No. 318.

Complete and File with Office of the Grant
County Surveyor, Grant County, Oregon,
Courthouse, Canyon City, Oregon 97820

